

## Home Audio/Theater

Amplifiers . . . . . 48, 50  
Breathe Audio . . . . . 50  
CD Players . . . . . 58  
Ceiling  
Speakers . . . . . 44-47, 50  
Coby . . . . . 61  
D/A Converter . . . . . 54  
DVD Players . . . . . 59-61  
HD Radio . . . . . 60  
Indoor/Outdoor  
Speakers . . . . . 55-57  
Infrared Repeaters . . . . . 52, 53  
In-Wall Speakers . . . . . 44-47  
i-Port . . . . . 51  
LCD Television . . . . . 61

MCM Custom  
Audio . . . . . 46-48, 53-57  
MG Electronics . . . . . 56  
Phono Preamplifiers . . . . . 54  
Receivers . . . . . 58-60  
Sherwood . . . . . 58  
Sony . . . . . 59-60  
Speakers  
(freestanding) . . . . . 55-57  
Speaker  
Distribution 46, 47, 49, 51  
SpeakerCraft . . . . . 48, 51-53  
Speco Technologies 47, 50  
Subwoofers . . . . . 57  
Volume Controls . . . . . 51-55



### Stellar Labs™ Dual 5 1/4" In-Wall Center Channel Speaker

Intended for use in home theater installations as a horizontal center channel speaker, this dual woofer system is also perfectly suitable in vertical arrangement as a front or rear speaker in the home theater, as well as whole house distributed audio. Shielded woofers solve issues with older CRT monitors, and independent high and low frequency compensation enable tailoring to the individual environment. **Features:** •Dual 5 1/4" poly cone woofers with rubber surrounds •1" pivoting silk dome tweeter •Treble compensation selector +/-0-3dB •Bass compensation selector +/-0-3dB •Microperforated aluminum grill **Specifications:** •Power capacity: 55W/80W RMS/peak •Frequency response: 60Hz-22KHz (±3dB) •Sensitivity: 90dB (W/M) •Impedance: 8ohm **Mounting:** •Overall frame: 7 1/2" (H) x 16 1/8" (W) •Required cutout: 5 1/2" (H) x 15" (W) •Depth: 3 1/2" •Sold individually

Order #	MSRP	(1-3)	(4-up)
50-10520	\$99.00	\$49.99	\$44.96



### Stellar Labs™ 8" Single Point Stereo Ceiling Speaker

Intended for small areas that do not justify installation of two speakers, this single stereo speaker provides both left and right audio channels, from a single point. Two independent crossover channels, two separately mounted tweeters, and a dual voice coil woofer provide an outlet for both left and right channels, from one 8" mounted speaker. It is perfect in entryways, bathrooms, hallways and similar areas for background or foreground music in whole house distributed audio and home theater environments. **Features:** •8" poly cone woofer with rubber surround •Dual 3/4" pivoting silk dome tweeters •Dual 6dB/octave crossovers •Cloth backed microperforated aluminum grill **Specifications:** •Power capacity: 40W/60W RMS/peak per channel •Frequency response: 50Hz-22KHz (±3dB) •Sensitivity: 88dB (W/M) •Impedance: 8ohm per channel **Mounting:** •Overall frame: 11.5" (dia) •Required cutout: 10" (dia) •Depth: 6" •Speaker system is sold individually

Order #	MSRP	(1-3)	(4-up)
50-10580	\$59.99	\$59.99	\$53.96

## Stellar Labs™

### Contractor Series In-Wall and Ceiling Speakers

This cost effective series of architectural speaker systems are designed to provide very good sound performance for the cost. Despite their "entry level" position in the Stellar Labs® line-up, these speakers match performance of others mid level and even some premium installed systems. Installation in existing wallboard is fast and easy using proven rotating plastic clips. And using a connection method borrowed from the commercial sound industry, detachable screw terminal strips greatly ease installation while providing a far superior connection to push terminals. **Features:** •Polypropylene cone woofer with butyl rubber surround •Pivoting silk dome tweeter •6dB/octave crossover •Rust proof perforated aluminum grill •Detachable phoenix style connector •Ceiling and in-wall speakers are sold in pairs, center channel speaker is sold individually



### Stellar Labs™ 6 1/2" Ceiling Speaker Pair

Popular size ceiling speaker is perfect for background or foreground music in whole house distributed audio and home theater environments. Their low cost also makes them suitable in large scale commercial music and paging environments. The mounting frame has a 30° offset, allowing proper aim when mounted close to walls and corners. **Features:** •6 1/2" poly cone woofer with rubber surround •1" pivoting silk dome tweeter •Cloth backed micro-perforated aluminum grill **Specifications:** •Power capacity: 40W/60W RMS/peak •Frequency response: 65Hz-20KHz (±3dB) •Sensitivity: 88dB (W/M) •Impedance: 8ohm **Mounting:** •Overall frame: 9.375" (dia) •Required cutout: 8.10" (dia) •Depth: 5" •Speaker system is sold in pairs

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-10510	\$119.00	\$59.99	\$53.96



### Stellar Labs™ 8" Ceiling Speaker Pair

Full size ceiling speaker is perfect for background or foreground music in whole house distributed audio and home theater environments. Their low cost also makes them suitable in large scale commercial music and paging environments. The mounting frame has a 30° offset, allowing proper aim when mounted close to walls and corners. **Features:** •8" poly cone woofer with rubber surround •1" pivoting silk dome tweeter •Micro-perforated aluminum grill **Specifications:** •Power capacity: 80W/55W RMS/peak •Frequency response: 60Hz-20KHz (±3dB) •Sensitivity: 89dB (W/M) •Impedance: 8ohm **Mounting:** •Overall frame: 11.5" (dia) •Required cutout: 10" (dia) •Depth: 5.25" •Speaker system is sold in pairs

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-10511	\$159.00	\$79.99	\$71.96



### Stellar Labs™ 6" In-Wall Speaker Pair

Compact in-wall speaker is perfect for background or foreground music in whole house distributed audio and as front or rear speakers in home theater environments. Their low cost also makes them suitable in large scale commercial music and paging environments. **Features:** •6 1/2" poly cone woofer with rubber surround •1" pivoting silk dome tweeter •Cloth backed micro-perforated aluminum grill **Specifications:** •Power capacity: 40W/60W RMS/peak •Frequency response: 65Hz-20KHz (±3dB) •Sensitivity: 88dB (W/M) •Impedance: 8ohm **Mounting:** •Overall frame: 12" (H) x 8.25" (W) •Required cutout: 10.25" (H) x 6.5" (W) •Depth: 3" •Speaker system is sold in pairs

Order #	MSRP	(1-3 prs.)	(4-up prs.)
50-10500	\$119.00	\$59.99	\$53.96



### Stellar Labs™ 8" In-Wall Speaker Pair

Full size in-wall speaker is perfect for background or foreground music in whole house distributed audio and as front and rear speakers home theater environments. Their low cost also makes them suitable in large scale commercial music and paging environments. **Features:** •8" poly cone woofer with rubber surround •1" pivoting silk dome tweeter •Cloth backed micro-perforated aluminum grill **Specifications:** •Power capacity: 55W/80W RMS/peak •Frequency response: 60Hz-20KHz (±3dB) •Sensitivity: 89dB (W/M) •Impedance: 8ohm **Mounting:** •Overall frame: 14.25" (H) x 10.25" (W) •Required cutout: 12.25" (H) x 8.75" (W) •Depth: 3.5" •Speaker system is sold in pairs

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-10501	\$159.00	\$79.99	\$71.96

### Premium Series In-Wall and Ceiling Speakers

High end architectural speaker systems require specific components and features in order to provide superior quality sound performance. While these components carry a higher cost, the difference need not be on an order of magnitude. The Stellar Labs® Premium Speaker Series is designed to provide optimum sound quality, without surpassing the point of diminishing return on expense. Honest-true specifications, thorough product design with no-nonsense components and special attention to finished appearance create a product that provides unmatched sound performance for the dollar. **Features:** •Aluminum cone woofer with butyl rubber surround •Pivoting aluminum dome tweeter •12dB/octave crossover •High and low frequency compensation selectors •Large vented woofer magnet •Rust proof perforated aluminum grill •Detachable phoenix style connector •Ceiling and in-wall speakers are sold in pairs, center channel speaker is sold individually



### 8" Premium Ceiling Speaker Pair

Full size ceiling speaker size is perfect for background or foreground music in whole house distributed audio and as front or rear speakers in home theater environments. High excursion woofers with extremely rigid aluminum cones combine to provide very good low frequency extension. The large vented magnet provides increased power capacity. The mounting frame features a 30° offset, allowing proper aim when mounted close to walls and corners. **Features:** •8" aluminum cone woofer with rubber surround •1" aluminum dome tweeter •Cloth backed microperforated aluminum grill •12dB/octave crossover •Selectable bass and treble compensation +3/0/-3dB **Specifications:** •Power capacity: 70W/100W RMS/peak •Frequency response: 45Hz-22KHz (±3dB) •Sensitivity: 89dB (W/M) •Impedance: 8ohm •Magnet size: 30 oz. **Mounting:** •Overall frame: 11 1/2" (dia) •Required cutout: 10" (dia) •Depth: 5 1/4" •Sold in pairs

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-10561	\$199.00	\$119.00	\$107.10



### 6 1/2" Premium Ceiling Speaker Pair

Highly popular ceiling speaker size is perfect for background or foreground music in whole house distributed audio and as front or rear speakers in home theater environments. High excursion woofers with extremely rigid aluminum cones combine to provide very good low frequency extension. The mounting frame features a 30° offset, allowing proper aim when mounted close to walls and corners. **Features:** •6 1/2" aluminum cone woofer with rubber surround •1" aluminum dome tweeter •Cloth backed microperforated aluminum grill •12dB/octave crossover •Selectable bass and treble compensation +3/0/-3dB **Specifications:** •Power capacity: 55W/80W RMS/peak •Frequency response: 50Hz-22KHz (±3dB) •Sensitivity: 90dB (W/M) •Impedance: 8ohm •Magnet size: 17 oz. **Mounting:** •Overall frame: 9 3/8" (dia) •Required cutout: 7 7/8" (dia) •Depth: 5" •Sold in pairs

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-10560	\$179.00	\$99.99	\$89.96

### 8" Premium In-Wall Speaker Pair

Full size in-wall speaker is perfect for background or foreground music in whole house distributed audio and as front or rear speakers in home theater environments. High excursion woofer with extremely rigid aluminum cone combines to provide very good low frequency extension. The oversized magnet assembly is vented to provide increased power capacity. This speaker will exceed the performance of bookshelf speakers of over twice the cost. **Features:** •8" aluminum cone woofer with rubber surround •1" aluminum dome tweeter •Cloth backed microperforated aluminum grill •12dB/octave crossover •Selectable bass and treble compensation +3/0/-3dB **Specifications:** •Power capacity: 70W/100W RMS/peak •Frequency response: 45Hz-22KHz (±3dB) •Sensitivity: 89dB (W/M) •Magnet size: 30 oz. •Impedance: 8ohm **Mounting:** •Overall frame: 14 1/4" (H) x 10 1/4" (W) •Required cutout: 12 1/4" (H) x 8 3/4" (W) •Depth: 3 1/2" •Sold in pairs

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-10551	\$199.00	\$119.00	\$107.10



### 6 1/2" Premium In-Wall Speaker Pair

Compact in-wall speaker is perfect for background or foreground music in whole house distributed audio and as front or rear speakers in home theater environments. High excursion woofers with extremely rigid aluminum cones combine to provide very good low frequency extension. This speaker will match the performance of bookshelf speakers of over twice the cost. **Features:** •6 1/2" aluminum cone woofer with rubber surround •1" aluminum dome tweeter •Cloth backed microperforated aluminum grill •12dB/octave crossover •Selectable bass and treble compensation +3/0/-3dB **Specifications:** •Power capacity: 70W/100W RMS/peak •Frequency response: 45Hz-22KHz (±3dB) •Sensitivity: 89dB (W/M) •Magnet size: 17 oz. •Impedance: 8ohm **Mounting:** •Overall frame: 14 1/4" (H) x 10 1/4" (W) •Required cutout: 12 1/4" (H) x 8 3/4" (W) •Depth: 3 1/2" •Sold in pairs

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-10550	\$179.00	\$99.99	\$89.96



### Dual 6 1/2" Premium In-Wall Center Channel Speaker

Intended for use in home theater installations as a horizontal center channel speaker, this dual woofer system is also perfectly suitable in vertical arrangement as a front or rear speaker in the home theater, as well as whole house distributed audio. Large dual 6 1/2" aluminum cone woofers provide tremendous mid bass and low frequency response, from a relatively narrow footprint. Shielded woofers solve issues with older CRT monitors, and independent high and low frequency compensation enable tailoring to the individual environment. **Features:** •Dual 6.5" aluminum cone woofers with rubber surrounds •1" pivoting aluminum dome tweeter •Treble compensation selector +3/0/-3dB •Bass compensation selector +0/-3dB •Cloth backed micro-perforated aluminum grill **Specifications:** •Power capacity: 55W/80W RMS/peak •Frequency response: 60Hz-22KHz (±3dB) •Sensitivity: 90dB (W/M) •Magnet size: 18 oz. on each woofer •Impedance: 8ohm **Mounting:** •Overall frame: 8.5" (H) x 18.75" (W) •Required cutout: 6.5" (H) x 17" (W) •Depth: 3.75" •Speaker system is sold individually

Order #	MSRP	(1-3)	(4-up)
50-10570	\$135.00	\$69.99	\$62.96

### Dual 8" In-Wall Subwoofer

This Stellar Labs® architectural speaker system provides outstanding bass response in any listening environment, without occupying valuable floor space. It is the perfect addition to in-wall, ceiling and small satellite speakers in home theater, whole house music or large scale background music installations. Two hefty 8" woofers are fed from a passive 12dB/octave 200Hz low pass filter, allowing simple addition to existing speakers (instructions in manual). Or, add any high-quality free standing amplifier, such as our Stellar Labs® SLA-150, and connect to a home theater receivers subwoofer output. The dual 8" woofers provide cone surface area of nearly that of a 12" woofer, yet may be mounted within a standard 2 x 4 wall cavity. The rugged ABS molded frame features eight rotating clips for direct, secure attachment to drywall, without the need for additional hardware. **Features:** •8" poly treated cone woofers, each with 30 oz. vented magnet •Treated foam surrounds •Dual channel 12dB/octave low pass filter •White steel grill •Detachable phoenix style connectors **Specifications:** •Power capacity: 100W/200W RMS/peak per channel •Frequency response: 45Hz-200Hz •Impedance: 8ohm per channel •Sensitivity: 91dB (W/M) •Dimensions (overall): 20 3/4" (H) x 11 3/4" (W) •Required cutout: 19 1/4" (H) x 8 3/4" (W) •Mounting depth 3 3/4" •Sold individually

Order #	MSRP	(1-3)	(4-up)
50-10575	\$179.00	\$99.99	\$89.96







## MCM CUSTOM AUDIO Micro In-Wall Speaker System

- ✓Mounts in a single gang box
- ✓Includes high pass capacitor

A rugged 2" full range driver is mounted in an attractive rectangular faceplate that is the same size as a standard wall switch or AC outlet. When used alone, it is perfect for voice reproduction in public areas, on kiosks or retail displays. Used in pairs, and combined with a subwoofer, it is perfect for any high fidelity audio application including home theater and whole-house audio. **Specifications:**

•Power capacity: 10W/20W RMS/peak •Frequency response: 300Hz~20KHz •Sensitivity: 85dB (W/M) •Nominal impedance: 8ohm •Front panel dimensions: 4 1/8" (H) x 3" (W) •Mounting depth: 1 1/2" •Sold individually

Order #	MSRP	(1-3)	(4-up)
50-7907	\$39.95	\$26.99	\$25.95



## MCM CUSTOM AUDIO Compact Ceiling Speaker System

- ✓Mounts in standard round ceiling box
- ✓Aluminum cone
- ✓Rubber surround

**RATED**  
★★★★★

Rugged 2 1/2" driver is mounted in an attractive round faceplate that is compatible with commonly available ceiling fan electrical boxes, such as the B618R series from Carlon (MCM #28-17060). Use in this manner allows inconspicuous mounting in a variety of areas where appearance is critical, or electrical codes are an issue. When used alone, it is perfect for moderate volume music and voice reproduction in public areas. Used in pairs, and combined with a subwoofer, it is perfect for any high fidelity audio application including home theater and whole-house audio. **Specifications:**

•Power capacity: 20W/30W RMS/peak •Frequency response: 100Hz~20KHz •Sensitivity: 85dB (W/M) •Nominal impedance: 8ohm •Front panel diameter: 5 1/2" •Mounting depth: 1 1/2" •Sold individually

Order #	MSRP	ONLY
50-9045	\$59.95	\$24.99




## MCM CUSTOM AUDIO Compact In-Wall Speaker System

- ✓Mounts in a double gang box
- ✓Aluminum cone
- ✓Rubber surround

Rugged 2 1/2" driver is mounted in an attractive square faceplate that is the same size as a double gang wall switch or AC outlet. When used alone, it is perfect for moderate volume music and voice reproduction in public areas, on kiosks or retail displays. Used in pairs, and combined with a subwoofer, it is perfect for any high fidelity audio application including home theater and whole-house audio. **Specifications:**

•Power capacity: 20W/30W RMS/peak •Frequency response: 100Hz~20KHz •Sensitivity: 85dB (W/M) •Nominal impedance: 8ohm •Front panel dimensions: 4 1/8" (H) x 5" (W) •Mounting depth: 1 1/2" •Sold individually

Order #	MSRP	(1-3)	(4-up)
50-7908	\$59.95	\$34.99	\$32.50

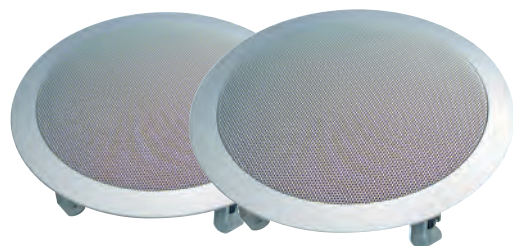

## MCM CUSTOM AUDIO Ceiling Mount Speaker Pair

- ✓Efficient dual cone design
- ✓Round ceiling mount

Low cost dual cone speaker pair is ideal for background music, paging and general audio applications. White plastic frame and painted steel grill compliments any decor. Attached mounting brackets easily mount in ceiling or wall board without additional hardware. 8ohm. **Sold in pairs.**

Order #	Speaker Size	Power Capacity RMS/Peak	Frequency Response	SPL	Overall Frame Diameter	Cutout Hole	Mounting Depth	MSRP	ONLY
50-6240	5 1/4"	15W/30W	110Hz~20KHz	90dB	8"	6 1/2"	2 1/2"	\$44.95	\$29.99
50-6241	6 1/2"	15W/30W	100Hz~18KHz	90dB	9"	7 1/2"	2 1/2"	59.95	39.99
50-6242	8"	20W/40W	80Hz~20KHz	91dB	10 1/2"	9 3/4"	3 3/4"	74.95	49.99



## Five-Way Speaker Switch Box

- ✓On/off control for five zones
- ✓Headphone jack
- ✓Compact size

Maintains 8ohm load when up to five sets of 8ohm speakers are used. Places 100ohm load when all speakers are switched off. Front panel 1/4" headphone jack allows monitoring of the source. 200W maximum power capacity. Metal case has non-skid rubber feet and stays securely in place. Dimensions: 8 1/2" (W) x 2 1/4" (H) x 3 3/8" (D). Sloped front, black color.

Order #	(1-5)	(6-9)	(10-up)
50-6200	\$24.99	\$22.95	\$20.95



## MCM CUSTOM AUDIO High Power 12 Pair Speaker Switch

Controls up to 12 pairs of speakers with 250W/750W RMS/music power capacity. High power transformers with selectable taps allow maximum power transfer while maintaining a safe load of 4ohm of higher. System is capable of transforming a 1/2ohm load to appear as a 4ohm load, several speaker pairs may be used on a single switch position, allowing more than 12 pairs of speakers to be connected. The left and right channels are completely isolated, allowing compatibility with any amplifier. Connections are made via rear mounted terminal strip which accepts up to 10AWG wire. Self powered, needs no AC supply. Dimensions: 17" (W) x 3 1/2" (H) x 6" (D). Black.

Order #	MSRP	(1-3)	(4-up)
50-6440	\$499.00	\$389.00	\$340.00



## MCM CUSTOM AUDIO High Power Eight Pair Speaker Switch

Controls up to eight pairs of speakers with 250W/750W RMS/music power capacity. High power transformers with selectable taps allow you to obtain maximum power transfer while maintaining a safe load of 4ohm or higher. Because the system is capable of transforming a 1/2ohm load to appear as a 4ohm load, several speaker pairs may be used on a single switch position. The left and right channels are completely isolated, allowing compatibility with any amplifier. Rear mounted terminal strip which accepts up to 10AWG wire. Dimensions: 17" (W) x 3 1/2" (H) x 6" (D).

Order #	MSRP	(1-3)	(4-up)
50-5705	\$399.00	\$263.54	\$251.99



## MCM CUSTOM AUDIO Four Pair Speaker Selector Switch

### Four Pair Speaker Selector Switch

Allows simultaneous operation of up to four pairs of 8ohm or 16ohm speakers. Automatic load protection ensures that the amplifier sees a 4ohm or higher load, regardless of speakers selected. The built-in protection circuit inserts resistance only when more than two pairs of speakers are selected. This ensures that maximum power is delivered to the speakers. Additional resistance is inserted only when needed. Amplifier A/B switch allows selection from two different sources allowing greater flexibility. Left and right channels are fully isolated from each other, allowing compatibility with any type of amplifier. Thermo-Tek™ circuit protects switch and components in the event of an overload situation. Power capacity 40W/120W RMS/program. Rear mounted terminal strip accepts up to 10AWG wire. Dimensions: 17" (W) x 2" (H) x 5" (D). Black color.

Order #	MSRP	(1-3)	(4-9)	(10-up)
50-2075	\$199.00	\$110.25	\$99.45	\$89.71

## Enclosed 6½" Two-Way Ceiling Speaker

Versatile ceiling speaker is uniquely compatible in high fidelity and commercial sound applications. Two-way coaxial design provides wide frequency response, and a multi-tap transformer allows compatibility with both 8ohm and 70V commercial systems.

Fully enclosed, attached metal back-box ensures uniform sound quality, regardless of mounting location, while protecting the speaker from insulation debris and temperature extremes. Rotating mounting clips allow fast installation in to ceiling tile and drywall with no additional hardware. **Optional accessories:** •Pre-construction brackets greatly ease installation in drywall ceilings in new-work environments •T-bar supports provide necessary weight loading in drop ceilings. **Specifications:** •Woofer: 6½" poly cone with foam surround •Tweeter: ¾" mylar dome •Power capacity: 50W/100W RMS/peak •Frequency response: 50Hz~20KHz •SPL: 90dB (W/M) •Transformer taps: 8ohm, 1W, 2W, 4W, 7.5W, 15W (rotary switch) •Overall frame diameter: 8" •Required cutout: 7" •Mounting depth: 4¼" **Note:** •Speakers and T-bar support sold individually •Pre-construction brackets sold in pairs

Order #	Description	MSRP	(1-3)	(4-up)
555-9100	Ceiling speaker	\$99.95	\$59.99	\$55.95
555-6937	T-bar support	-	6.09	5.79



## Enclosed 8" Two-Way Ceiling Speaker

### Enclosed 8" Two-Way Ceiling Speaker

Versatile ceiling speaker is uniquely compatible in high fidelity and commercial sound applications. Two-way coaxial design provides wide frequency response, and a multi-tap transformer allows compatibility with both 8ohm and 70V commercial systems. Fully enclosed, attached metal back-box ensures uniform sound quality, regardless of mounting location, while protecting the speaker from insulation debris and temperature extremes. Rotating mounting clips allow fast installation in to ceiling tile and drywall with no additional hardware. Optional T-bar supports provide necessary weight loading in drop ceilings. **Specifications:** •Woofer: 8" poly cone with butyl rubber surround •Tweeter: 1" dome •Power capacity: 60W/120W RMS/peak •Frequency response: 47Hz~20KHz •SPL: 92dB (W/M) •Transformer taps: 8ohm, 5W, 10W, 20W, 30W, 40W (rotary switch) •Overall frame diameter: 10¼" •Required cutout: 9¼" •Mounting depth: 8" •Sold individually

Order #	Description	MSRP	(1-3)	(4-up)
555-9110	Ceiling speaker	\$119.95	\$69.99	\$62.50
555-7891	T-bar support	-	5.09	4.69



## speco technologies MA Series Ceiling Speaker

Completely enclosed ceiling speaker is the ideal all-purpose solution, covering a wide variety of distributed commercial and residential sound applications. Internal 25V/70V transformer taps are easily selected via the front baffle, allowing final volume balancing to be done after installation. 8ohm position is provided for residential applications. Rear back box provides protection to the speaker plus consistent sound, regardless of location. Polypropylene cone woofers and ported enclosures provide extended frequency response typical of much higher cost units. **Features:** •Rubber surround woofers •1" mylar dome tweeter •Fire retardant ABS rear enclosure •White ABS frame with rotating mounting clips •Easily installs to existing wallboard •Transformer taps: 0.25W, 0.5W, 1W, 2.5W, 5W, 7.5W, 15W, 30W, 40W (#50-7536 only) •Sold individually

Order #	Woofer Size	Power Capacity RMS/Peak	Frequency Response	SPL (W/M)	Overall Frame Diameter	Cutout Hole	(1-3)	(4-11)	(12-up)
50-7535	5½"	30W/60W	57Hz~20KHz	87dB	9.9"	8.2"	\$48.99	\$42.95	\$39.95
50-7536	6½"	40W/80W	34Hz~20KHz	88dB	11.42"	9.74"	58.99	49.95	46.95



## speco technologies

### Enclosed Two-Way In-Wall Speaker Pairs

Easy to install in-wall speakers are ideal for background music, paging, home theater or any general music application. Their wide frequency response and above average power capacity make them ideal as main, surround or background speakers. System consists of a woven fiberglass, blue cone woofer, with rubber surround, and a 1" titanium swivel dome tweeter. The addition of a molded PVC back-box ensures uniform sound quality regardless of mounting location, while protecting the speaker from insulation debris and temperature extremes. Rotating mounting clips allow fast installation in to drywall with no additional hardware. All will mount in a standard 2 x 4 studded wall. Each speaker is 8ohm. **Sold in pairs.**

Order #	Woofer Size	Power Capacity RMS/Peak	Frequency Response	SPL (W/M)	Overall Frame Dimensions	Price Per Pair (1-3) (4-11) (12-up)
50-6547	5½"	40W/80W	55Hz~20KHz	88dB	11.75" (H) x 8.3" (W) x 3.6" (D)	\$96.99 \$87.00 \$77.00
50-6548	6½"	60W/100W	50Hz~20KHz	88dB	12.0" (H) x 8.6" (W) x 4.25" (D)	123.00 111.00 99.95
50-6549	8"	80W/120W	50Hz~20KHz	88dB	14.0" (H) x 10.0" (W) x 4.1" (D)	148.00 133.00 118.00



## MCM CUSTOM AUDIO

### Speaker Selector/Distribution Panel

Impedance matching speaker selector/distribution network is ideal in situations where up to ten pairs of speakers are to be connected to a single amplifier, and individual on/off selection is required. Additionally, a two-position source selector allows global selection from two different source systems. High-powered non-inductive resistors ensure that the speaker load never falls below 4ohm, even when all ten pairs of speakers are operating. Heavy-duty rocker switches are rugged enough for commercial use, while remaining suitable for residential applications. Detachable terminal strips accept up to 14AWG wire. The rugged steel panel is intended for 19" rack mounting, and occupies two rack spaces. Power capacity: 200W per channel. Overall dimensions: 3.5" (H) x 19" (W) x 2" (D). **Limited quantities.**

Order #	MSRP	ONLY
50-7655	\$199.00	\$59.99



## MCM CUSTOM AUDIO

### Multi Room Speaker Distribution Strip

Essential for distributed residential sound installations, this terminal strip provides a convenient method of connecting numerous pairs of speakers to a single pair of binding posts. Input terminals are heavy-duty, gold plated brass, five-way binding posts, which will accept single or paired banana plugs or bare wire up to 8AWG. Each output connection features detachable screw terminal strips which accept up to 14AWG wire. Internal PC board circuit is reinforced with internal point-to-point 14AWG wiring, for improved current capacity. Compact size allows easy location behind equipment. Screw holes allow easy wall mounting and rubber feet are included for shelf top use. **Note:** Terminal strip is straight parallel connection and provides no impedance protection. It is intended for use with 70V distributed speakers, or 8ohm systems that utilize impedance matching volume controls. **Specifications:** •Power capacity: 200W RMS per channel •Dimensions: 2" (H) x 2.25" (W) x 10.5" (L), including binding posts.

Order #	MSRP	(1-3)	(4-up)
50-2204	\$59.95	\$35.99	\$32.95



## MCM CUSTOM AUDIO

### Multi Room Speaker Distribution Strip

Designed for use in multi room sound distribution installations where individual speaker selection is not required. Impedance protection circuit allows up to eight sets of 8ohm speakers to be connected to a stereo amplifier, and appear as a 4ohm load. Completely independent left and right circuits allow compatibility with all amplifier types. Attached mounting plate allows installation into standard 19" racks, or between studs spaced on 16" centers. **Features:** •Color coded push terminals accept up to 8AWG wire •Switchable impedance protection •Non-inductive resistors for full frequency response •Rugged aluminum housing with black finish **Specifications:** •Power capacity: 120W program per channel •Frequency response: 20Hz~20KHz •Dimensions: 3.5" (H) x 19.0" (W) x 2.25" (D)

Order #	MSRP	(1-3)	(4-11)
50-2202	\$139.95	\$89.99	\$84.95



## sima . Speaker Selectors

- ✓ Volume adjustment in each zone
- ✓ A/B source selection
- ✓ 100W RMS capacity

Versatile speaker switches allows connection of up to two six pairs of speakers, to two different stereo sources, with individual volume control of each pair. Volume adjustment and impedance matching is accomplished through internal heavy-duty multi-trapped transformers. Rear screw terminal strips accept up to 14AWG wire, and are removable, allowing easy connection of multiple cables. **Power capacity:** 18W/50W RMS/program per speaker, 100W/150W RMS/program total. Dimensions: 3" (H) x 17" (W) x 7" (D), including knobs.

Order #	Speaker Pairs	(1-3)	(4-up)
50-6675	Four	\$199.00	\$194.00
50-6676	Six	239.00	233.00




# Section 3 Home Audio/Theater

**NEW!**

## SpeakerCraft Two Channel Stereo Contractor Amplifier

Highly versatile amplifier is designed to power additional zones in an existing whole house audio system, or multiple zones, with external impedance matching. Because it also includes speaker level inputs, and auto switching, it can also be used to place a local source on a pair of speakers connected to a separate whole-house system. **Four trigger modes:** •Audio sensing from a line or speaker level source •Video sensing at composite video loop-through jack •12VAC/DC trigger input •Current sensing AC accessory outlet **Features:** •Speaker and line input •12VDC trigger output •Recessed front panel gain controls with rear bypass •Heavy-duty binding post speaker outputs •Available in shelf top or 2RU rack mount configurations **Specifications:** •Power output: 50W RMS (8ohm), 65W RMS (4ohm) per channel •THD: 0.08% (8ohm load) •Dimensions: 3 1/2" (H) x 17" (W) x 8 1/2" (D)


Order #	Model #	Enclosure	ONLY
50-8845	AMP-BB50S	Shelf top	\$499.00
50-8846	AMP-BB50S-R	Rack mount	\$19.00



## SpeakerCraft Two Channel Stereo Contractor Amplifiers

Highly versatile amplifiers are designed to individual or multiple zones in whole house audio system. High current design makes these amplifiers stable to 2ohm, allowing connection of up to four pairs of speakers without impedance concerns. Units may be manually powered on/off, controlled via external trigger, or set for auto sensing on the line level input. **Features:** •Line level input with loop-through output •12VDC trigger output •Front panel gain controls •Heavy-duty binding post speaker outputs •Available in shelf top or rack mount configurations **Specifications:** •Power output assumes 4ohm load •THD: 0.08% (8ohm load) •Dimensions: see below (H) x 17" (W) x 14 1/2" (D)

Order #	Model #	Output Power RMS x 2CH	Enclosure	ONLY
50-8850	AMP-BB275S	100W	Shelf top	\$699.00
50-8851	AMP-BB275S-R	100W	2RU rack mount	\$719.00
50-8855	AMP-BB2125	180W	Shelf top	\$99.00
50-8856	AMP-BB2125-R	180W	3RU rack mount	\$1019.00

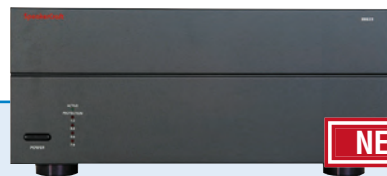

## SpeakerCraft Multi Zone Multi Channel Contractor Amplifiers


Highly versatile amplifiers are available in four zone (eight channel) and six zone (12 channel) configurations, with either 35W or 65W per channel output, to suite a variety of needs. Additionally, all models are available with tabletop or rack mount chassis, providing a total of eight solutions for a wide range of installation requirements. **Features:** •Independent line inputs for each channel pair •Selectable main bus input with loop through output •Each amplifier input can be set to left, right or summed mono source •Independent level trim for each amplifier channel •Bridging capability between channel pairs •3~30VAC/DC trigger input •Selectable auto-sensing or 3~30VAC/DC trigger power ON/OFF •Heavy-duty binding post speaker outputs **Specifications:** •Power output assumes 8ohm load •See MCM website for specific dimensions and distortion specifications

Order #	Model #	Zones	Output Power	ONLY
<b>Shelf Top</b>				
50-8860	AMP-BB835	Four	35W RMS x 8CH	\$1079.00
50-8865	AMP-BB865	Four	65W RMS x 8CH	\$1499.00
50-8870	AMP-BB1235	Six	35W RMS x 12CH	\$1279.00
50-8875	AMP-BB1265	Six	65W RMS x 12CH	\$2699.00
<b>Rack Mount</b>				
50-8861	AMP-BB835-R	Four	35W RMS x 8CH	\$1099.00
50-8866	AMP-BB865-R	Four	65W RMS x 8CH	\$1699.00
50-8871	AMP-BB1235-R	Six	35W RMS x 12CH	\$1289.00
50-8876	AMP-BB1265-R	Six	65W RMS x 12CH	\$2709.00

## SpeakerCraft Electronic System Cooler

Designed for use with SpeakerCraft multi zone amplifiers, this cooling system can be used with any electronic equipment with heat dissipation issues. Simply mount above item in the rack, or place directly on top of equipment for highly effective cooling. Remote trigger accepts 3~24VDC signal from other equipment to turn on fans. Temperature sensing, variable speed fans detect the amount of heat being generated by components, adjusting speed accordingly. **Features:** •Completely automatic operation •3.5mm trigger in and out connections •Dual whisper quiet brushless fans •Red LED power indicator •Green LED fan "ON" indicator •Available shelf top or rack mount versions •Two minute shutoff delay **Specifications:** •Air volume: 150CFM •Dimensions (shelf): 1 1/2" (H) x 17" (W) x 10 1/4" (D) •Dimensions (rack): 1 1/2" (H) x 19" (W) x 10 1/4" (D)

Order #	Enclosure	ONLY
50-8840	Shelf top	\$299.00
50-8841	Rack mount	\$349.00



## Stellar Labs SLA 150 Stereo Power Amplifier

This amplifier was designed specifically for use in distributed audio installations, where high reliability and premium sound quality are a must. Remote on/off triggering and signal sensing allows this amplifier to be set up in equipment racks, with no further contact required. Rear mounted master level controls keep installation safe from future tampering. Two auto-switching inputs allow automatic operation when used with more than one system. **Features:** •Front panel controls for level, balance and A/B speaker selection •Two sets of L/R inputs, each may be switched to accept line level speaker level signal •Auto-switching between inputs, with adjustable delay •Manual or auto-sensing power control •12V trigger input •12V trigger output •Power output: 75W RMS x 2CH @4ohm, 150W RMS bridged

Order #	MSRP	ONLY
50-4610	\$449.00	\$199.00



## Ultra Compact 40 Watt Stereo Amplifier

Weighing in at less than 6 oz., this miniature stereo amplifier is smaller than a deck of cards, yet delivers an incredible 20W RMS per channel. It is perfect for driving a pair of speakers directly from a portable MP3 player or PC, flat panel TV or any other line or headphone level source. 92% efficient digital amplifier circuit is housed in a rugged extruded aluminum enclosure and is convection cooled, ensuring whisper quiet operation. **Features:** •3.5mm input •Included 3.5mm male/male cable •Detachable Phoenix style speaker connections •LED power indicator •Includes AC adapter **Specifications:** •Output: 20W x 2CH @ 8ohm •THD 0.11% at 50% rated power •S/N ratio: >99dB •Requires 24VDC, 2A •Dimensions: 1.0" (H) x 2.2" (W) x 2.78" (D).

Order #	ONLY
50-4600	\$79.99

**NEW!**



## Compact 18 Watt Stereo Amplifier

Very small stereo amplifier is perfect for driving a pair of speakers directly from a portable MP3 player or PC, flat panel TV or any other line or

headphone level source. 90% efficient digital amplifier circuit is housed in a rugged extruded aluminum enclosure and is convection cooled, ensuring whisper quiet operation. **Features:** •Rotary level control •Selectable high pass, low pass and full range operation •L/R RCA line level input •LED power indicator •Screw terminal power and speaker connections **Specifications:** •Output: 9W RMS x 2CH at 4ohm •Full 20Hz~20KHz frequency response •Requires 12VDC, 3A, AC adapter not included (#28-10703) •Dimensions: 1.6" (H) x 3.15" (W) x 4.5" (D)

Order #	ONLY
50-4602	\$49.99



## SpeakerCraft Automatic A/B Line Level Switch

This switching device automatically selects between two line level sources to a single input. L/R RCA female input/output connections accommodate left and right channels, making it perfect for all consumer electronic devices. Default input-A is selected when no signal is present. When a signal is sensed at input-B, the selector automatically switches to that input. A separate 12VDC, 100mA signal is also provided to trigger other external devices. Trigger sensitivity is fully adjustable from 10~100mV. Off delay (from B back to A after absence of signal) is adjustable in eight steps from 0.5 seconds to 10 minutes. This unit requires 12VDC. Optional AC adapter available (#50-8362).

Order #	(1-3)	(4-11)
50-8385	\$59.99	\$54.95



## SpeakerCraft Automatic A/B Speaker Level Switch

This switching device automatically selects between two stereo amplifiers to a single pair of speakers. It is perfect in situations where installed speakers are used with both a local stereo or home theater system, and a distributed audio system. Default input-A is selected when no signal is present. When a signal is sensed at input-B, the selector automatically switches to that input. A separate 12VDC, 100mA signal is also provided to trigger other external devices. Trigger sensitivity is fully adjustable from 30~300mV. Off delay (from B back to A after absence of signal) is adjustable in eight steps from 0.5 seconds to 10 minutes. Relay contacts are 4PDT, with isolated L/R ground paths. Music power capacity is 100W. This unit requires 12VDC. Optional AC adapter available (#50-8362).

Order #	(1-3)	(4-11)	(12-up)
50-8390	\$90.49	\$85.50	\$76.50

## ACOUSTIC RESEARCH Universal Wireless Speaker Conversion System

- ✓ Perfect for rear channel speaker installation
- ✓ Compatible with virtually any speaker
- ✓ Uncompress CD quality audio

Highly flexible modular wireless adapter system allows untethered placement of speakers anywhere in a home theater room, or throughout the house. They may even be used on temporary bases with outdoor speakers. Complete ARW51 system consists of the AudioLink transmitter, capable of sending 5.1 independent channels of audio to six separate receivers. Five receivers have on board 60W RMS amplifiers, allowing them to directly power any speaker system. The sixth has a subwoofer line out, for driving any powered sub. ARW20 system includes the AudioLink transmitter, and only two amplified receivers, perfect for those rear channel speakers that often create wire routing issues. Individual amplified receivers, and line level subwoofer receiver are available separately, allowing total wireless speaker flexibility. Because multiple receivers may be driven from a single transmitter channel, these are a perfect solution for distributing sound throughout the residence. The system utilizes channel hopping 2.4GHz technology, ensuring interference free performance. Uncompressed CD quality audio transmits true, full frequency response audio, without loss of dynamic range. Transmitter and each receiver operate from their own AC adapter. Amplified receivers have five-way binding post speaker outputs, subwoofer receiver as female RCA line level out.

Order #	Model #	Description	ONLY
50-6930	ARW51	Complete 5.1 system	\$599.99
50-6935	ARW20	AudioLink transmitter, (2) amplified receivers	249.99
50-6940	ARWR2	Individual 60W RMS amplified receiver	99.99

## Two-Way Speaker Switch Box

Tabletop control box allows selection of A/B speaker pairs. Internal 220ohm resistors ensure that amplifier always sees a load, even with both switches off. With both speaker switches in "on" position, speaker pairs are connected in series, allowing use of 4ohm or 8ohm speaker systems, without damage to amplifier. 200W maximum power capacity. All connections are push type. Metal case has non-skid rubber feet and stays securely in place. Dimensions: 6.9" (W) x 2.2" (H) x 3.9" (D). Sloped front, black color.

Order #	(1-5)	(6-9)	(10-up)
50-6185	\$18.99	\$17.95	\$14.29

## SpeakerCraft® Free Standing Stereo Volume Control

Intended for use when in-wall type controls are not practical, this control is ideal for use with free standing remote speaker systems. **Features:** •Removable terminal strip for greatly eased installations •12 step attenuation •Suction cup feet to hold the unit secure during use **Specifications:** •Power capacity: 60W RMS •Frequency response: 20Hz~20KHz •Dimensions: Overall depth: 2.19" (H) x 8.5" (W) x 6.5" (D) •Call for larger quantity pricing

Order #	(1-3)	(4-11)	(12-up)
50-8275	\$92.99	\$87.60	\$78.80

## Ten Position Speaker Switch

Intended for PA or other monaural applications, this switch box provides individual on/off control of up to ten speaker systems. Power capacity is 100W RMS, internal progressive resistor network keeps amplifier load to a minimum of 2ohm, when ten 8ohm systems are selected. Rear speaker in/out connections are color coded push connectors. Metal case has non-skid rubber feet and stays securely in place. Dimensions: 8" (W) x 2 1/4" (H) x 4 1/4" (D). Black color. **Note:** Because low resistance loads can be damaging to some amplifiers, the customer must ensure that the total speaker load will be within the limits of the equipment in use.

Order #	(1-5)	(6-9)	(10-up)
50-6205	\$18.99	\$18.03	\$14.68

NEW!



# Home Audio/Theater

Section  
3

## MCM CUSTOM AUDIO

### Eight Position Speaker Selector

NEW!

Compact table top selector provides cost effective selection of up to eight pairs of speakers, from one location. It provides a perfect solution to the need for low cost distributed audio in residential audio or commercial sound applications. Internal switching uses a combination of series and parallel wiring, ensuring that the connected amplifier sees a minimum of a 4ohm load (when 8ohm speakers are used). This means that any conventional amplifier or stereo receiver can drive multiple sets of speakers, without the need for external impedance matching devices. **Features:** •Rugged metal enclosure •Non skid rubber feet •Color coded push terminals for all speaker connections •Heavy-duty rocker switches •Attractive sloped top panel •Power capacity: 50W RMS per channel •Frequency response: 10Hz~50KHz •Dimensions: 2 1/2" (H) x 12" (W) x 4 1/4" (D)

Order #	ONLY
50-6225	\$34.99

## Table-Top Speaker Volume Control

- ✓ Single speaker pair control
- ✓ Headphone jack
- ✓ 100W RMS capacity

Table-top control center provides external volume adjustment for a single pair of speakers. 12 position rotary control utilizes multi tapped transformers for efficient power transfer, with no heat build-up. Rear speaker in/out connections are heavy duty push terminal strips and accept up to 14AWG wire. Heavy metal case has non-skid rubber feet and stays securely in place. Dimensions: 1 1/4" (H) x 7" (W) x 3 3/8" (D). Silver color.

Order #	(1-4)	(5-9)	(10-up)
50-6216	\$34.99	\$32.95	\$29.95

## Speaker Selector Volume Control

- ✓ Volume adjustment in each zone
- ✓ A/B source selection
- ✓ 216W RMS capacity

These control boxes can operate multiple speaker pairs of 4, 8 and 16ohm impedance in any combination and can be used with either one or two stereo amplifiers. This makes it convenient to listen to different program material in different rooms. 216W Optimatch™ attenuators are employed so that worst case operating conditions will appear as a 4ohm load to the amp. Made in USA.

Order #	Speaker Pairs	ONLY
50-2390	Six	\$399.00
50-2395	Four	199.00



## MCM CUSTOM AUDIO

### Eight Position Input Selector

NEW!

Compact table top selector provides cost effective selection of up to eight stereo sources into the line level input of an amplifier. Ideal when multiple sources are present, such as television, computer, portable media players, CD or DVD players, and similar devices, and all need to be switched into a single sound system **Features:** •Rugged metal enclosure •Non skid rubber feet •Color coded R/L RCA female input connections •Individual pushbuttons for each input •Dimensions: 2 1/2" (H) x 12" (W) x 4 1/4" (D)

Order #	ONLY
50-6202	\$29.99

## MCM CUSTOM AUDIO

### Single Channel Amplifier Module

Compact amplifier is perfect for any general purpose application where a speaker needs to be driven from a line level signal. Its compact size allows it to be mounted most any place, and may be directly attached to the rear of a speaker enclosure. It is ideal for a wide variety of hobby, service and prototype applications. **Features:** •RCA female input •Accepts line level or headphone level signal •12" attached speaker leads •Barrel type power connector **Specifications:** •Input: Line level (80mV) •Output: 12W @ 4ohm •Requires 6~16VDC, 800mA •Dimensions: 1 1/2" (H) x 2 1/4" (W) x 2" (D)

Order #	MSRP	(1-4)	(5-9)	(10-up)
50-4605	\$29.95	\$14.99	\$13.75	\$12.75



Follow us on:

MCMelectronics.com

Product Questions Email: tech@MCMelectronics.com

Email: quotes@MCMelectronics.com

page  
49



# Section Home Audio/Theater

3



## speco technologies a-live™ Multi-Zone Network Audio System

Simply plug the a-live™ into your existing computer network, and play digital music directly from your PC to any and all zones. Streamed audio files can be played from the same playlist simultaneously among different zones. For example, if a user in zone one selects a song to start playing, a different user in an other zone can select the same song to play, from the beginning, without interfering with the current play in zone one. Or choose to play a completely different song. Each of the six zones may independently select the same, or different songs, all from the same playlist. Most major unprotected formats are supported.

An intuitive GUI interface allows you to remotely program and control any zone from a PC. This works perfect with laptops on wireless enabled networks. For large-scale environments, dozens of a-live™ units can be networked together and all controlled via the same GUI.

Optional a-live™ keypads (shown) provide total zone control, including volume w/mute, tone, and full control of all PC-based music including forward, back, pause and scrolling information of artist and song name. Keypads also have IR remote control capability for external source devices such as DVD and CD players and home theater receivers.

The control unit features six amplified zones, each may independently select from up to six different sources, plus the network input. The 8ohm residential model features six stereo channels, each with 20W RMS power output per channel. The 70V model is designed for commercial distributed systems, where multiple speakers will be powered from each zone. This unit features six mono channels, each with 20W RMS power output, capable of driving 25V or 70V distributed speaker systems.

Order #	Model #	Description	ONLY
555-10200	A6X6A70	70V, six mono zones	\$1125.00
555-10210	A6X6A8	8ohm, six stereo zones	895.00
555-10220	AKPA	Optional interactive LCD keypad	98.49



## breatheaudio™

### Elevate™ 6.6 Whole Home Music System

This complete six zone, six source sound system brings multi-zone, multi-source audio to a new price level. Purchase the BA-6640MS as the main unit, to drive up to six zones. Add the BA-6640XS Expander to the main unit, to control up to a total of 12 zones. **Features:** •Six independent stereo amplifier channels, one for each zone •Individual keypad control for each zone •Independent selection from up to six input sources from each zone •Complete control of input source, volume level and system power on/off from each keypad •Infrared repeating from each keypad to control source devices as well as the Elevate™ unit.

**Complete six zone kit includes:** •Elevate 6.6 base unit •Allport™ connection cable •IR emitters •IR remote control •Six remote keypads **Specifications:** •Power output: 20W RMS x 12 CH •THD: 0.4% •Frequency response: 30Hz~20KHz •Power requirements: 110/220VAC, 50/60Hz, 166W •Dimensions: 3.5" (H) x 17" (W) x 12.75" (D)

Order #	Model #	Description	ONLY
50-4645	BA-6640MS	Complete Six Zone Kit	\$977.47
50-4647	BA-6640XS	Six Zone Expander	977.47



## breatheaudio™ Elevate™ Whole Home Music System

This complete four zone sound system brings multi-zone, multi-source audio to a new price level. **Features:** •Four independent stereo amplifier channels, one for each zone •Individual keypad control for each zone •Independent selection from two input sources from each zone •Complete control of input source, volume level and system power on/off from each keypad •Infrared repeating from each keypad to control source devices as well as the Elevate™ unit **Elevate™ amplifier includes:** •Elevate base unit •Allport™ connection cable •Two IR emitters •IR remote control •Complete four-room kit also includes four remote keypads **Specifications:** •Power output: 15W RMS x 8 CH •THD: 0.4% •Frequency response: 30Hz~20KHz •Power requirements: 110/220VAC, 50/60Hz, 166W •Dimensions: 3.5" (H) x 8.5" (W) x 12.75" (D)

Order #	Model #	Description	ONLY
50-4650	BA-2430S	Complete four room kit	\$489.00



## breatheaudio™

### Resonate™ 6½" Single Stereo Ceiling Speaker

Designed for use with the Elevate™ Whole Home Music System, this high performing ceiling speaker is perfect for any residential or small commercial distributed sound system. This speaker features a dual voice coil woofer and dual tweeters, allowing it to act as two speakers in one opening. It is perfect for providing L/R audio to small lavatories, entryways and hallways.

**Features:** •Dual 13mm mylar dome tweeters •6½" poly cone woofer with rubber surround •Rotating plastic clips for easy mounting to existing drop ceiling tile or drywall •Optional pre-construction bracket to ease new-construction installations **Specifications:** •Power capacity: 50W RMS (each channel) •Frequency response: 50Hz~20KHz •Impedance: 8ohm (each channel) •SPL: 91dB (W/M) **Dimensions:** •Outer frame diameter: 9" •Required cutout: 8" diameter •Mounting depth: 3" •Sold individually

Order #	Model #	Description	ONLY
50-4667	BA-650CS	Ceiling speaker	\$64.99
50-4668	BA-BK6C	Pre-construction bracket pair	12.99



## breatheaudio™

### Resonate™ 6½" Ceiling Speaker Pair

Designed for use with the Elevate™ Whole Home Music System, this high performing ceiling speaker pair is perfect for any residential or small commercial distributed sound system. The micro perforated grill adds to the aesthetic beauty of these speakers, which may be painted to match any décor. **Features:** •Pivotal 20mm silk dome tweeter •6½" poly cone woofer with rubber surround •Rotating plastic clips for easy mounting to existing drop ceiling tile or drywall

•Optional pre-construction bracket to ease new-construction installations **Specifications:** •Power capacity: 50W RMS •Frequency response: 50Hz~20KHz •Impedance: 8ohm •SPL: 91dB (W/M) **Dimensions:** •Outer frame diameter: 9" •Required cutout: 8" diameter •Mounting depth: 3" •Sold in pairs

Order #	Model #	Description	ONLY
50-4665	BA-650C	Speaker pair	\$99.99
50-4668	BA-BK6C	Pre-construction bracket pair	12.99

RATED  
★★★★★



## Sherwood® Distributed Audio Stereo Receiver

This receiver is perfect for music listening in any room of the home, with conventional left/right stereo output. What sets this apart is four amplifier output channels, creating a self contained, four-zone distributed audio receiver. Up to four pairs of bookshelf, in-wall, in-ceiling or outdoor speakers may be driven directly from this unit, with independent selection of any or all pairs. It is perfect in small residential or commercial background music applications. **Features:** •AM/FM tuner with 30 station presets •Five audio inputs (including tuner) •Phono input •IR remote control •Volume, bass and treble controls •Headphone jack •Power output: 70W RMS x 4 (8ohm), 100W RMS x 4 (4ohm) •THD: <0.2%, 20Hz~20KHz into 8ohm •Dimensions: 5" (H) x 17½" (W) x 13" (D) •Mfr. #RX-5502

Order #	Model #	ONLY
50-4640		\$159.00



## breatheaudio™

### Elevate™ Music System Learning Remote Control

Learning IR remote control operates all functions of the Elevate™ Music System, and may be programmed to operate source devices. This allows operation of tuners, satellite receivers, CD or DVD players from any Elevate™ zone, simply by pointing the remote at the wall mounted keypads.

Order #	Model #	ONLY
50-4651	BA-LRC1	\$34.99



### IP Addressable Speaker Selector

The AudioFlexNet eight zone speaker selector allows control of the audio system from any device that runs a browser, including desktop and laptop PCs, PDAs, portable gaming devices, or smart cellular telephones. Each AudioFlexNet unit is treated as just another device on the network for seamless integration. A configuration page is included that allows the control panel to be customized for any system and each zone can be named for the room it controls for simple operation. The selector provides feedback information to the browser, confirming status for each zone. The eight zone speaker selector is a straight parallel connection without impedance matching, making it ideal for use with 70V distributed systems. For conventional 8ohm systems, impedance matching volume controls are recommended for each speaker pair. Model #SW-2.

Order #	ONLY
50-10450	\$399.00

### SpeakerCraft® Audiophile Grade In-Wall Volume Controls

These stereo volume controls are designed for use in distributed audio systems, primarily with in-wall and ceiling speakers. Resistor based design provides much improved frequency response when compared to conventional transformer based units. Specially selected non-inductive, high capacity resistors ensure full frequency response, with less than 0.5dB variance. Decora style face plate is compatible with standard decora single and multi gang covers. Single gang cover is included. Unit is shipped as white color, hardware and knobs are included for conversion to bone or almond. **Features:** •Available in 60W and 120W RMS models •Special push-lock connector for fast connection without a screwdriver •Fits standard electrical boxes and low voltage brackets •12 step attenuation **Specifications:** •Frequency response: 20Hz~20KHz, <±0.5dB •Overall depth: 2 1/2"

Order #	Power Capacity	(1-3)	(4-11)	(12-up)
50-8230	60W RMS	\$34.99	\$33.19	\$29.59
50-8240	120W RMS	39.99	36.95	33.95

### SpeakerCraft® Parallel Connecting Blocks

Ends the problem of multiple speaker home runs to a single location. The CB connecting block enables easy connection of four pairs of speakers, to a single bus. This bus then is easily connected to the amplifier output. The CBX expansion blocks can then be added to the connecting block, providing connection for four additional pairs. An endless number of CBX blocks may be cascaded on a single CB block. Compact units have screw holes for attaching inside the wall, to a stud. **Note:** This is a straight parallel connection and no impedance protection is provided. Impedance matching volume controls must be used if the overall impedance falls below the minimum level of the amplifier.

Order #	Description	(1-3)	(4-11)	(12-up)
50-8305	CB connecting block	\$34.99	\$31.95	\$29.33
50-8306	CBX expansion block	31.99	28.95	26.78



### SpeakerCraft® Multi-Zone Speaker Selectors

Ideal for controlling multiple pairs of installed speaker systems from a single location. Four and eight zone models are available with simple pushbutton on/off control for each zone. Four and six zone versions feature on/off selectors as well as 12 step volume controls for each zone. **Features:** •Rugged 17" wide metal housing (S4DC is 8 1/2") •Front panel impedance protection switch, with rear panel override •Suction feet to hold unit firmly to shelf during use •Removable screw terminal connections accept up to 14AWG wire •100 room labels to customize to any application **Specifications:** •Power capacity: 125W RMS per channel (all zones combined) •Frequency response: 20Hz~20KHz ±0dB •Dimensions (S4DC): 2 1/2" (H) x 8 1/2" (W) x 6 1/2" (D) •Dimensions (others): 2 1/2" (H) x 17" (W) x 6 1/2" (D)

Order #	Mfr. #	Description	(1-3)	(4-11)
50-8400	S8DC	Eight zone	\$250.00	\$237.50
50-8405	S4DC	Four zone	150.00	142.50
50-8430	S6VC	Six zone with volume controls	425.00	403.75
50-8435	S4VC	Four zone with volume controls	350.00	332.50

### SpeakerCraft® Impedance Matching Volume Control

These stereo in-wall volume controls are designed for use in distributed audio systems, primarily with in-wall and ceiling speakers. Impedance matching design enables up to 8 pairs of 8ohm speakers to be connected to a stereo amplifier, and appear as a 4ohm load. Decora style face plate is compatible with standard decora single and multi gang covers. Single gang cover is included. Unit is shipped as white color, hardware and knobs are included for conversion to bone or almond. **Features:** •Detachable terminal strip, greatly easing installation •Fits standard electrical boxes and low voltage brackets •Ten step attenuation **Specifications:** •Power capacity: 45W RMS •Frequency response: 20Hz~20KHz •Overall depth: 2 1/2"

Order #	(1-3)	(4-11)	(12-up)
50-8220	\$31.49	\$29.13	\$26.04

### SpeakerCraft® Outdoor Volume Controls

Specifically designed for outdoor applications, these volume controls feature stainless steel hardware and a PVC enclosure, and are ideally suited for use with landscaping "rock" speaker systems. The housing attaches to standard 3/4" PVC conduit for simplified watertight installation. Resistor based design provides improved frequency response when compared to conventional transformer based units. Specially selected non-inductive, high capacity resistors ensure full frequency response, with less than 0.5dB variance. **Features:** •Special push-lock connector for fast connection without a screwdriver •Fits standard electrical boxes and low voltage brackets •12 step attenuation **Specifications:** •Power capacity: 60W •Frequency response: 20Hz~20KHz, <±0.5dB •Overall depth: 2 1/2" •Call for larger quantity pricing

Order #	Color	(1-3)	(4-11)	(12-up)
50-8270	Gray	\$74.99	\$68.49	\$61.75
50-8271	White	74.99	68.49	61.75

### iPort iPod® Wall Dock

With an iPod system installed, music can be enjoyed through your speaker system while your iPod is conveniently charged. **Features:** •Compatible with most dockable iPod models including iPod touch •Delivers local-zone unbalanced audio up to 30' away •Dimensions: 4 3/4" (W) x 6 1/2" (H) x 3 1/2" (D) •Cut-out dimensions: 4" (W) x 5 1/2" (H) **Includes:** •iPort dock (faceplate and utility box) •Wall plate and cable •Audio wall plate •Regulated power supply •Mfr. #IW-20

Order #	ONLY
50-10405	\$199.00

### SpeakerCraft® Impedance Matching Volume Control

These stereo in-wall volume controls are designed for use in distributed audio systems, primarily with in-wall and ceiling speakers. Impedance matching design enables up to 18 pairs of 8ohm speakers to be connected to a stereo amplifier, and appear as a 4ohm load. Decora style face plate is compatible with standard decora single and multi gang covers. Single gang cover is included. Unit is shipped as white color, hardware and knobs are included for conversion to bone or almond. **Features:** •LiftLock™ connector, enables fast connection without a screwdriver •Fits standard electrical boxes and low voltage brackets •12 step attenuation **Specifications:** •Power capacity: 60W RMS •Frequency response: 20Hz~20KHz •Overall depth: 2 1/2"

Order #	(1-3)	(4-11)	(12-up)
50-8200	\$49.99	\$47.50	\$44.95

### SpeakerCraft® In-Wall Volume Control

These stereo volume controls are designed for use in distributed audio systems, primarily with in-wall and ceiling speakers. Decora style face plate is compatible with standard decora single and multi gang covers. Single gang cover is included. Unit is shipped as white color, hardware and knobs are included for conversion to bone or almond. **Features:** •LiftLock™ connector, enables fast connection without a screwdriver •Fits standard electrical boxes and low voltage brackets •12 step attenuation **Specifications:** •Power capacity: 60W RMS •Frequency response: 20Hz~20KHz •Overall depth: 2 1/2"

Order #	(1-3)	(4-11)	(12-up)
50-8210	\$39.99	\$37.75	\$33.95



# Section 3 Home Audio/Theater



## SpeakerCraft® Complete SmartPath IR Repeater System

Take the guess work out of setting up a typical one room system with this complete IR repeater kit, everything is included in one convenient package. **System includes:** •One IRC-3.0 shelf top receiver •One AT-1.0 amplified terminator unit •One PS-1.0 power supply •Four IRE-1.0 IR emitters



## SpeakerCraft® Shelf Top IR Receivers

### Shelf Top IR Receivers

Compact receivers are housed in an attractive case to sit on the surface of a cabinet or shelf. Clearly visible

system status and IR activity LEDs provide positive feedback to the user. Models include an 8' attached lead, terminated with SpeakerCraft's unique four-conductor 3.5mm plug. Provides a reception angle of 110°. Dimensions: 1 1/4" (L) x 3 3/4" (W) x 1 1/8" (D)

Order #	Mfr. #	(1-3)	(4-11)	(12-up)
50-8363	IRC-3.0 KIT	\$215.00	\$204.00	



## SpeakerCraft® Flush Mount Mini IR Receivers

Compact receivers require only a 1/2" hole, and may be mounted flush in cabinets or walls, leaving only a circular bezel exposed to the room. They may also be mounted behind the grill of most in-wall speakers. Each includes a set of four color bezels (almond, black, bone and white), to match any décor. Also included are two specially designed ALR (ambient light restrictor) bezels, for use near plasma displays. Clearly visible system status and IR activity LEDs provide positive feedback to the user. Models include an 8' attached lead, and are available with bare wire connections or SpeakerCraft's unique four-conductor 3.5mm plug. Receivers provide a reception angle of 110° standard, 60° with ALR bezel installed. **Dimensions:** •Unit: 1/2" diameter x 2 1/4" (L) •Cap bezel: 3/4" diameter x 1/8" (L) •ALR bezel: 3/4" diameter x 3/8" (L)

Order #	Mfr. #	Connection	(1-3)	(4-11)	(12-up)
50-8310	IRC-1.0	3.5mm plug	\$126.10	\$120.00	\$107.25
50-8311	IRC-1.1	Bare leads	127.00	-	-



## SpeakerCraft® Ultra Compact Plasma Block Mini IR Receivers

These units are designed to block plasma, CFL, EMI, and ESI noise sources, using SpeakerCraft's exclusive "smart" circuit (patent pending). The actual sensor and

electronics are separated into separate "main" and "pick-up" modules, enabling installation into very tight spaces of furniture recesses, monitor panels and under shelves. The main module houses the status and activity LEDs. Detachable lead between main and pick-up module totals 6' in length. The main module has attached 5' lead, terminated with bare wire connections or SpeakerCraft's unique four-conductor 3.5mm plug. Overall reception angle is 100°. **Dimensions:** •Pick-up module: 1/2" (L) x 1/2" (W) x 1/2" (D) •Main module: 2 1/4" (L) x 3/8" (W) x 1/2" (D)

Order #	Mfr. #	Connection	(1-3)	(4-11)	(12-up)
50-8320	IRC-2P2.0	3.5mm plug	\$115.00	\$105.00	\$95.00
50-8321	IRC-2P2.1	Bare leads	115.00	105.00	95.00



## SpeakerCraft® Break Out Terminator

The BOT-1.0 breakout terminator provides bare wire connection to SmartPath IR receivers that are equipped with SpeakerCraft's standard four-conductor

3.5mm plug. This allows plug terminated receivers to be connected to the EZ-connect terminal blocks, as well as other brand three and four wire systems.

Order #	Mfr. #	(1-3)	(4-11)
50-8345	BOT-1.0	\$9.29	\$8.82



## SpeakerCraft® Wall Mount "Junction Box" IR Receivers

Attractive receivers include clearly visible system status and IR activity LEDs, to provide positive feedback to the user, and mount in standard single gang junction boxes or low-voltage brackets. Decora style design is

compatible with standard wall plates, single gang plate is included. EZ-connector terminal block allows simple connection of unterminated twisted pair wire. Dimensions: 4" (H) x 1 1/2" (W) x 1" (D)

Order #	Mfr. #	Color	(1-3)	(4-11)	(12-up)
50-8330	IRC-4.0	White	\$120.00	\$115.00	\$102.50
50-8332	IRC-4.0	Almond	120.00	115.00	102.50



## SpeakerCraft® Surface Mount Mini IR Receivers

Compact receivers are intended for surface mounting on cabinets,

TV sets or the wall, with attached double sided adhesive. Clearly visible system status and IR activity LEDs provide positive feedback to the user. Models are available in black or white, with 8' attached lead, terminated with bare wire connections or SpeakerCraft's unique four-conductor 3.5mm plug. Black version, with stripped leads is also available with the ALR (ambient light restrictor) lens for use near plasma displays. Standard receivers provide a reception angle of 110°, the ALR version is 60°. **Dimensions:** 2 1/4" (L) x 1 1/2" (W) x 1/8" (L)

Order #	Mfr. #	Color	Connection	(1-3)	(4-11)	(12-up)
50-8316	IRC-2.0	Black	3.5mm plug	\$121.00	\$115.25	\$103.15
50-8317	IRC-2.1	White	Bare leads	121.00	115.25	103.15
50-8318	IRC-2.1	Black	Bare leads	127.60	121.35	108.95
50-8319	IRC-2.1	Black	Bare leads	127.65	121.35	108.75



## SpeakerCraft® Emitter Cover

Prevents IR signals from interfering with other components. Fits over SmartPath IR emitters or components IR sensor window. Units measure 1" x 2" and may be trimmed to fit.

Order #	Mfr. #	(1-3)	(4-11)	(12-up)
50-8371	IR SHIELD	\$2.00	\$1.90	\$1.70

## SpeakerCraft® SmartPath Infrared Repeating System

SmartPath's easy installation and configuration allow installers to quickly create a pathway of complete A/V system control. All components are available separately for versatile configuration of any custom system. Emitters and receivers may be connected with two pairs of 24AWG solid or stranded unshielded twisted pair wire, including standard Cat 5, for distances up to 1200'. Heavier gauge cable can be used for distances of up to 5000'. **A complete system requires the following four basic components:** •At least one infrared receiver •One connecting block •As many emitters as needed to control A/V components •One DC power supply



## SpeakerCraft® Amplified Terminator Unit

The AT-1.0 amplified terminator unit functions as central control unit for large multi room IR systems, allowing connection of the power supply, IR emitters

and receivers. EZ-connect terminal block allows connection of multiple daisy chained receivers. Four-conductor 3.5mm jack accepts connection of one similarly equipped receiver. This unit has a total of four outputs that will drive four emitters, or two emitters and two blasters. The EMX-1.0 expansion terminator (#50-8350) allows connection of additional emitters. 5-24VDC status input accepts status signal from IR controlled equipment, and provides visual indication at each IR receiver.

Order #	Mfr. #	(1-3)	(4-11)	(12-up)
50-8335	AT-1.0	\$79.99	\$75.95	\$67.95



## SpeakerCraft® Passive Terminator

The PT-1.0 passive terminator functions as central control unit for compact, single room IR

systems, allowing connection of the power supply, up to two IR emitters and a single IR receiver, equipped with a four-conductor 3.5mm plug. 5-24VDC status input accepts status signal from IR controlled equipment, and provides visual indication at the IR receiver.

Order #	Mfr. #	(1-3)	(4-11)	(12-up)
50-8340	PT-1.0	\$11.49	\$10.65	\$9.65



## SpeakerCraft® Emitter Expansion Terminator

The EMX-1.0 expansion terminator expands the number of outputs of the AT-1.0 amplified terminator unit. This

passive device simply plugs into the emitter output of the AT-1.0, and provides up to ten emitter outputs. A feed through output is also provided, allowing multiple EMX-1.0s to be cascaded. Includes 12" cable for connection to the AT-1.0.

Order #	Mfr. #	(1-3)	(4-11)
50-8350	EMX-1.0	\$21.99	\$19.99



## SpeakerCraft® Octagonal Light Collector Lens

IR lens is designed to attach to equipment or remote mounted IR receivers to improve reliability of IR reception. Multi-array

mirror system provides 90° reflection angle, insuring equipment will "see" the IR emitter. Sold in packages of ten.

Order #	Mfr. #	(1-3 pkgs.)	(4-11 pkgs.)	(12 pkgs.-up)
50-8370	ILC-1.0	\$18.49	\$17.10	\$15.30

## SpeakerCraft® Standard IR Emitters

Compact sensors attach via included double sided adhesive, and may be mounted near equipment to be controlled. Multiple configurations are available to suit a variety of applications. Dual emitter units allow placement in front of two pieces of equipment, from only one plug connection. Units with visible LEDs provide visible feedback of presence of IR signal. Each includes an attached 8' lead, terminated with a two-conductor 3.5mm plug.



Order #	Mfr. #	Description	(1-3)	(4-11)	(12-up)
50-8356	IRE-1.0	Single emitter	\$11.99	\$10.89	\$10.09
50-8357	IRE-2.0	Dual emitter	\$21.99	\$19.95	\$17.95
50-8358	IRE-3.0	Single emitter w/visible LED	\$11.99	\$10.89	\$10.09
50-8359	IRE-4.0	Dual emitter w/visible LED	\$19.99	\$18.95	\$16.95

## SpeakerCraft® Micro Mini IR Emitter

Extremely compact IR sensor is only slightly larger diameter than its connection cable, and can be placed inside the actual component, near the IR sensor. This emitter will "blast" the entire chassis, ensuring the equipment IR sensor will receive the signal. It is a great alternative to "untidy" front panel emitters. Includes 8' lead terminated with two-conductor 3.5mm plug.



Order #	Mfr. #	(1-3)	(4-11)	(12-up)
50-8355	IRE-0.5	\$23.49	\$21.95	\$19.79

## SpeakerCraft® High Power IR Blaster

Designed for installation into equipment rack, this unit is intended to provide sufficient output to control all components. The unique 3" wand features two high output IR emitters "flooding" the rack with the remote signal. The wand can be adjusted above or below a rack of components to suit specific situation. Attached 8' lead is terminated with a two-conductor 3.5mm plug.



Order #	Mfr. #	(1-3)	(4-11)	(12-up)
50-8360	IRE-5.0	\$29.99	\$28.03	\$25.08

## SpeakerCraft® SmartPath Connecting Cables

Use to adapt components for use with other equipment, or to extend existing leads.

Sets include: •PTP-1.0:

Set of six, 12"

2-conductor cables, male

to male 3.5mm plugs •PTP-8: Set of six, 8'

2-conductor cables, male to male 3.5mm plugs

•PTJ-40: 40' 2-conductor cable, male to female

3.5mm plugs •QIX-1.0: 15' 4-conductor cable, male

to female 3.5mm plugs •SAC-1.0: Diode protected "Y"

cable, single female to two male 3.5mm plugs, allows

connection of one emitter to two sources •PTS-3: Set of

six, 36" 2-conductor cables, male 3.5mm plug to stripped

leads •STS-4: Set of six, 48" 2-conductor cables, barrel

type power plug to stripped leads.



Order #	Mfr. #	(1-3 sets)	(4-11 sets)	(12 sets -up)
50-8372	PTP-1.0	\$20.00	\$19.00	\$17.00
50-8373	PTP-8	\$32.99	\$30.45	\$27.20
50-8375	QIX-1.0	\$8.50	\$8.08	\$7.23
50-8377	PTS-3	\$12.49	\$11.40	\$10.20

## MCM CUSTOM AUDIO

### Keystone Mount 3.5mm Connector

This keystone insert features a standard 3.5mm three-conductor female jack which may be used in two or three conductor applications. It is ideal any time a 3.5mm connector is needed at a wall plate. Rear mounted IDC connector allows simple, fast connection to unterminated Cat 5 cable, or any 22~24AWG solid or stranded, UTP or shielded wire. **Maximum voltage: 24VAC/DC, 1A.**  
**Applications:** •Remote location of headphone jacks •Remote microphone connections •Remote input from PC sound card, MP3 player or iPod™ •IR repeater connection •Remote triggering of A/V components •Low voltage DC connection •Sold individually



Order #	MSRP	(1-3)	(4-up)
50-7753	\$12.95	\$6.99	\$5.95

## MCM CUSTOM AUDIO

### Keystone Mount DC Power Connection

This keystone insert features a standard barrel jack which accepts connection from most AC adapters. It is essential when low voltage must be inserted into a Cat 5 pair for remote distribution. It is ideal for remote powering of small LCD monitors, video cameras, IR repeater systems and similar items. Rear mounted IDC connector allows simple, fast connection to unterminated 22~24AWG solid or stranded wire. **Maximum voltage: 24VAC/DC, 1A. Barrel size: 2.1mm I.D., 5.5mm O.D.**  
•Sold individually



Order #	MSRP	(1-3)	(4-up)
50-7752	\$11.95	\$6.99	\$5.95

## SpeakerCraft® SmartPath IR System Power Supplies

Supplies plug directly into SpeakerCraft terminator models AT-1.0 or PT-1.0 to provide power to the entire IR repeater system. Both high quality units are regulated at 12VDC, at the current rating shown below. The correct power supply, with sufficient current output, must be selected for the system in place. To calculate current requirements, simply add the current draw of each device to determine the total current needed. **Current draw of SpeakerCraft devices are as follows:** •IR emitters: 15mA •IR receivers: 6mA •IR blasters: 150mA •Terminator units AT-1.0 and PT-1.0 add no additional current draw



Order #	Mfr. #	Current	(1-3)	(4-11)
50-8361	PS-2.0	1200mA	\$55.49	\$52.25
50-8362	PS-1.0	200mA	\$13.49	\$12.35

## SpeakerCraft® In-Wall A/B Speaker Switch

Simple pushbutton A/B operation allows selection of two speaker pairs from a single amplifier, or a single pair of speakers to select between two separate sources. Ideal when a pair of in-wall or ceiling speakers is needed for a local stereo or home theater system, and whole house audio. Mounts in standard single gang electrical boxes or low voltage brackets, units include decora cover plate and all hardware.

Order #	Description	(1-3 kits)	(4-11 kits)
50-8440	White	\$34.99	\$33.20
50-8441	Bone	\$34.99	\$33.20
50-8442	Almond	\$34.99	\$33.20



# Home Audio/Theater

## Section 3



### Input Source Switch Boxes

Tabletop control box allows selection of multiple input sources. Ideal when connecting several audio devices, such as CD players, VCRs, laser disk players and satellite receivers to home stereo equipment. Models available to select from three, four or five sources. Internal PC board design provides quiet, reliable operation. All connections are all RCA type female. Metal case has non-skid rubber feet and stays securely fixed in place. Dimensions: 6.9" (W) x 2.2" (H) x 3.9" (D).

Order #	Positions	(1-5)	(6-9)	(10-up)
50-6170	Three	\$14.49	\$13.03	\$10.98
50-6175	Four	\$15.49	\$14.45	\$11.92
50-6180	Five	\$16.99	\$15.27	\$12.10



### Three-Way Audio/Video Switch Box

Tabletop control box allows selection of multiple A/V sources. Ideal when connecting several devices, such as CCTV cameras, camcorders, VCRs, laser disk players and satellite receivers to a single video monitor or VCR. Accommodates video and left and right audio, all connections are all RCA type female. Metal case has non-skid rubber feet and stays securely in place. Dimensions: 6.9" (W) x 2.2" (H) x 3.9" (D). Sloped front, black color.

Order #	(1-5)	(6-9)	(10-up)
50-6195	\$19.99	\$18.95	\$15.09

### A/B Input Source Switch Box

Compact control box allows selection of two input sources into a single auxiliary or tape input. Single push button switch selects source "A" or "B". Ideal when connecting audio devices such as CD players, VCRs, laser disk players and satellite receivers to home stereo equipment. Output connection is made via attached 5' lead, terminated with male RCA type connectors, color coded red and white. Input connections are RCA type female. Rugged metal enclosure is black in color, dimensions: 3" (W) x 1" (H) x 3" (D) including switch and connections.

Order #	(1-5)	(6-9)	(10-up)
50-6220	\$8.99	\$8.19	\$7.49





# Section 3 Home Audio/Theater



## ART Phono Preamplifier/USB Interface

This high quality USB audio interface with standalone RIAA phono preamp acts as an interface between your computer and a wide variety of analog and digital sources. Analog inputs are switchable between phono and line level signals and a low cut filter removes rumble and wind noise while leaving the audio pristine. The front panel USB monitor/headphone 1/8" jack and the optical output on the rear panel can monitor audio output from your computer. Line output jacks are always connected to the input preamps signal for source monitoring. The unit may be powered by an external power source or from USB port. Optical TOSLINK in/outs and S/PDIF input let you use this as a digital audio to USB interface as well. Fully compliant with the USB 1.1 specification and uses USB adaptive mode for playback and USB asynchronous mode for record. It will work with the USB audio device drivers built into Windows 98SE/ME/2000/XP or Macs with native USB support OS9.1 or greater or OSX. No special drivers required. **Specifications:** •Frequency response: 10Hz-50KHz •THD: .01% dB •A/D & D/A: 16 bit, 44.1KHz or 48KHz USB selectable •Power requirements: 7-12VDC or 9-12VAC, 150mA, or USB bus •Dimensions: 1.75" (H) x 4.2" (W) x 3.5" (D)

Order # 555-2717 MSRP \$99.49



## ART DJPRE-II Phono Preamplifier

Since newer receivers typically do not include magnetic phono connection, this pre-amplifier is required to connect a turntable to a conventional line level input. It is also necessary if playing LPs through a computer sound card, mixing console, or other professional equipment. In addition to providing the required gain, this unit also adds necessary RIAA equalization to compensate for the industry standard EQ curve utilized on LPs. **Features:** •L/R RCA inputs and outputs •Adjustable ±10dB gain •Selectable 100pF/200pF input capacitance •Switchable 3dB low cut at 22Hz •Signal clip indicator •Turntable ground lug •Power requirements: 7-12VDC or 9-12VAC •AC adapter included •Dimensions: 1.75" (H) x 4.2" (W) x 3.5" (D)

Order # 555-2716 MSRP \$49.49

## MCM CUSTOM AUDIO Phono Input Attenuator

Device allows standard line level items to be played through magnetic phono inputs, commonly found on older home audio receivers and mixing consoles. CD/DVD/MP3 players, tape decks, VCRs, computer sound cards and tuners may now be connected to unused phono inputs. In addition to providing the required signal attenuation, this unit provides passive equalization to compensate for the RIAA curve that is present on magnetic phono inputs. Inputs are RCA female, outputs are male RCA connections on a 7" pigtail. Passive device requires no power. Dimensions: 1" (H) x 2.25" (W) x 3" (D)

Order # 50-7240 MSRP \$14.59 (1-3) \$10.99 (4-11) \$9.19 (12-up) \$8.29

## audio-technica Phono Preamplifier

High-quality preamplifier is built to the exacting standards that made Audio-Technica one of the largest magnetic phono cartridge manufacturers in the world. It is perfect when turntables need to be played through conventional line level amplifier inputs. Use to connect a turntable to newer home theater equipment, to a computer sound card, mixing console, or other professional equipment. In addition to providing the required gain, it adds necessary RIAA equalization to compensate for the industry standard EQ curve utilized on LPs. Unit features L/R RCA female type inputs and outputs, plus a separate ground lug. **Specifications:** •Frequency response: 20Hz-20KHz •S/N ratio: 80dB •Input sensitivity: 2.5mV •Phono input impedance: 47Kohm •Power requirements: 15VDC, 20mA, AC adapter included •Dimensions: 1.18" (H) x 2.76" (W) x 3.62" (D)

Order # 50-7778 MSRP (1-3) \$99.99 (4-up) \$89.95



## MCM CUSTOM AUDIO Phono Preamplifier

Allows a turntable to be played through conventional line level inputs such as aux, tape, tuner or CD. It is also useful for operating a turntable with a computer sound card, mixing console, or other professional equipment. **Features:** •L/R RCA female type inputs and outputs •Separate ground lug **Specifications:** •Frequency response: 30Hz-20KHz •Input level: 6mV •Output level: 500mV •S/N ratio: >60dB •Requires 117VAC, 60Hz •Dimensions: 1 1/2" (H) x 2 3/4" (W) x 4 1/4" (D)

Order # 40-630 MSRP \$24.95 (1-9) \$19.99 (10-up) \$17.95



## Input Source Mixer/Headphone Amplifier

Versatile table-top device features two stereo line level inputs and a single line level output, allowing the user to mix two sources into one. Slide controls allow independent gain adjustment for each source. Front panel 3.5mm stereo headphone jack, with slide level control, is provided for monitoring of the mixed source. Compact unit is perfect for any application requiring a low cost line mixer, or headphone amplifier. Metal case has non-skid rubber feet and stays securely in place. All connections, except headphone, are RCA type female. Requires 12VDC, 100mA. AC adapter included. Dimensions: 1 1/2" (H) x 5" (W) x 4 1/2" (D). Black color.

Order # 50-6182 MSRP \$26.99 (1-4) \$24.95 (5-9) \$21.95 (10-up)

## MCM CUSTOM AUDIO Dual Channel Ground Loop Isolator

Ground loop problems in A/V systems normally appear as a hum in speakers or horizontal bars on video monitors. These problems typically occur when multiple components receive AC power from different locations, or because CATV, satellite or antenna systems provide a separate ground point. This isolator solves that problem by providing ground path isolation between components, while maintaining full frequency response. **Features:** •Rugged steel enclosure •RCA input and output connections •Fully independent L/R channels **Specifications:** •Frequency response: 10Hz-50KHz •THD: 0.01% •Dimensions: 1.50" (H) x 3.50" (W) x 2.50" (D) •Passive device, requires no power


Order # 50-9040 MSRP \$49.95 (1-3) \$31.99 (4-up) \$26.95



## MCM CUSTOM AUDIO 24 Bit/96K D/A Converter

This compact unit will accept standard coax or Toslink SPDIF signal, and convert it to line level audio. It is perfect when there is a need to send digital audio signal to an amplifier not having digital inputs, including home audio receivers, prosound amplifiers and mixing consoles. It is perfect when an unused digital output on a piece of home theater equipment needs to be sent to a separate whole house audio amplifier. **Features:** •Two Toslink inputs •Two coax inputs •Four-position input selector with LED indication •1/8" headphone output with adjustable level •Separate REC and AMP line level L/R RCA outputs (both fixed level) •LED power indicator **Specifications:** •Digital input: 96KHz (standard SPDIF) •Resolution capability: 24 bit •Amplitude linearity: 1.06dB •Frequency response: 20Hz-20KHz •Channel separation: 100dB @ 1KHz •S/N ratio: 103dB •THD: <0.0015% •Digital filter: 82dB •Headphone output: 700mW, 8-32ohm •Power requirements: 12VDC, AC adapter included •Dimensions: 1 1/2" (H) x 9 1/4" (W) x 4 1/2" (D)

Order # 50-7774 MSRP \$179.00 (1-3) \$105.00 (4-up) \$89.95

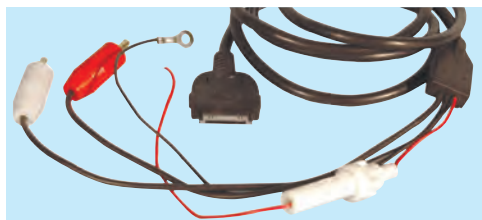

## Input Interface Cable for iPod™

5' cable allows connection of your iPod™ to any amplifier with standard line level inputs. It is perfect for use with home theater and distributed audio systems, as well as autostand systems having RCA line level inputs. Proprietary connector inserts directly into the bottom of the iPod™ and provides fixed line level output through L/R RCA male connectors. Cable assembly also provides regulated power supply to the iPod™ allowing it to be charged or powered from external 12VDC source.

Order # 50-9185 MSRP \$17.99



## MCM CUSTOM AUDIO Audio LeveliZer™ Line Level Stabilizer

Maintains a constant average output loudness, regardless of the audio source type or loudness. Perfect for louder than program commercials on radio and TV, and volume variations between different broadcasting stations, records and CDs (perfect for multi-disc players). Connect to the tape loop of any amplifier or receiver, or between the pre-amp and power amplifier, or between audio outputs of TV or VCR and amplifier inputs. Because this device monitors average input level, normal program dynamics experienced in high action video scenes are maintained. Dimensions: 2 1/2" (H) x 7 1/4" (W) x 3 3/4" (D) excluding control knob. Black in color.

Order # 50-6155 MSRP \$299.00 (1-3) \$242.00



## MCM CUSTOM AUDIO

### Indoor/Outdoor, Foreground/Background Speaker Pairs

Rugged weatherproof speaker pairs are designed to meet the needs of virtually any indoor or outdoor situation, in both residential whole-house systems and distributed commercial sound environments. Rear mounted rotary switch selects multiple taps on the internal 70V transformer **Features:** •Polypropylene cone woofers with rubber surrounds •Soft dome tweeters with dispersion lens •UV resistant ABS resin composite enclosures

#### They are the ideal choice for:

- ✓Monitoring in the studio or small stage venues.
- ✓Large scale commercial systems including, retail commercial, industrial, public transportation and school environments
- ✓High fidelity sound distribution in clubs, sports bars, health spas, community centers
- ✓Outdoor sound distribution in residential distributed systems

#### 5 1/4" Indoor/Outdoor Speaker Pair

•5 1/4" woofers with rubber surround •1" soft dome tweeters  
•Power capacity: 50W/100W RMS/peak •Sensitivity: 86dB (W/M) •Nominal impedance: 8ohm •Frequency response: 60Hz~20KHz •Transformer taps: 2.5W, 5W, 10W, 20W, 30W •8ohm bypass •Dimensions: 10.75" (H) x 7" (W) x 6" (D) •Sold in pairs

Order #	Color	(1-3 prs.)	(4 prs.-up)
50-8880	White	\$84.99	\$76.50
50-8881	Black	84.99	76.50

#### 6 1/2" Indoor/Outdoor Speaker Pair

•6 1/2" woofers with rubber surround •1" soft dome tweeters  
•Power capacity: 60W/120W RMS/peak •Sensitivity: 88dB (W/M) •Nominal impedance: 8ohm •Frequency response: 55Hz~20KHz •Transformer taps: 5W, 10W, 20W, 30W, 40W •8ohm bypass •Dimensions: 13" (H) x 8 3/4" (W) x 7 1/2" (D) •Sold in pairs

Order #	Color	(1-3 prs.)	(4 prs.-up)
50-8885	White	\$129.00	\$116.50
50-8886	Black	129.00	116.50



#### 8" Indoor/Outdoor Speaker Pair

•8" woofers with rubber surround •1" soft dome tweeters  
•Power capacity: 80W/160W RMS/peak •Sensitivity: 88dB (W/M) •Nominal impedance: 8ohm •Frequency response: 45Hz~20KHz •Transformer taps: 10W, 20W, 30W, 40W, 50W •8ohm bypass •Dimensions: 17" (H) x 11 1/2" (W) x 10" (D) •Sold in pairs

Order #	Color	(1-3 prs.)	(4 prs.-up)
50-8890	White	\$149.00	\$135.00
50-8891	Black	149.00	135.00

## speco technologies Indoor/Outdoor Speaker Pair

Compact speakers are ideal for use with a subwoofer in a compact home theater arrangement, or as satellites in remote locations including the patio, deck or near the pool. The fully weatherproof ABS housing, polypropylene cone woofer and mylar tweeter enable permanent mounting outdoors. Mounting brackets and hardware are included. **Specifications:** •Power capacity: 30W/50W RMS/peak each •Frequency response: 55Hz~20KHz •Impedance: 8ohm •Dimensions: 7 1/4" (H) x 4 1/2" (W) x 4 1/2" (D) •Available in black or white •Sold in pairs

Order #	Color	(1-3 prs.)	(4 prs.-up)
50-6580	Black	\$68.99	\$61.95
50-6581	White	68.99	61.95



## MCM CUSTOM AUDIO Outdoor Volume Control

Specifically designed for outdoor applications, this volume control features a specially designed gasketed PVC enclosure, and is ideally suited for use with landscaping "rock" speaker and other outdoor systems. The housing attaches to standard 3/4" PVC conduit for simplified watertight installation. Internal jumpers are provided for x1, x2, x4, x8 and x16 impedance multipliers, allowing compatibility in standard and impedance matched installations. **Features:** •Detachable screw terminal strips accept up to 14AWG speaker cable •12 step attenuation •May be anchored by PVC conduit alone or with the four attached wall mount tabs •Gray PVC enclosure with matching knob **Specifications:** •Power capacity: 100W RMS •Frequency response: 35Hz~20KHz •Enclosure dimensions: 4 1/4" (H) x 3" (W) x 3 1/4" (D)

Order #	MSRP	(1-3)	(4-9)	(10-up)
50-7885	\$74.95	\$42.99	\$39.95	\$34.95



## speco technologies AWD Series Indoor/Outdoor Speaker Pair

- ✓6 1/2" woofer
- ✓8ohm model
- ✓Includes mounting brackets

All weather design makes these an ideal choice for both indoor and outdoor sound installations. Larger woofer size and higher power capacity also makes these suitable in foreground music applications. **Features:** •High immunity to outdoor elements •Rubber surround •1/2" PEI dome tweeter **Specifications:** •Power capacity: 50W/100W RMS/peak •Frequency response: 54Hz~20KHz •SPL: 89dB (W/M) •Transformer taps 3.75W, 7.5W, 15W and 30W (70V/25V models only) •Impedance: 8ohm •Dimensions: 10 1/2" (H) x 8 1/2" (W) x 6 1/2" (D) •Available in black or white •Sold in pairs

Order #	Color	Transformer	(1-3 prs.)	(4 prs.-up)
50-7550	Black	No	\$155.00	\$133.00
50-7551	White	No	155.00	133.00

## speco technologies AWD Series Indoor/Outdoor Speaker Pair

- ✓5 1/2" woofer
- ✓Separate 8ohm and 70V models
- ✓Includes mounting brackets

All weather design makes these an ideal choice for both indoor and outdoor sound installations. Included "U" brackets and wedge design allow a wide variety of mounting capabilities. Available in 8ohm or 25V/70V transformer configurations, they are perfect for most residential or commercial sound applications. **Features:** •High immunity to outdoor elements •5 1/2" polypropylene woofer •Rubber surround •1/2" PEI dome tweeter **Specifications:** •Power capacity: 40W/80W RMS/peak •Frequency response: 60Hz~20KHz •SPL: 88dB (W/M) •Transformer taps 3.75W, 7.5W, 15W and 30W (70V/25V models only) •Non transformer model impedance: 8ohm •Dimensions: 8 3/4" (H) x 7" (W) x 5 1/2" (D) •Available in black or white •No transformer •Sold in pairs

Order #	Color	(1-3 prs.)	(4 prs.-up)
50-7540	Black	\$124.85	\$104.65
50-7541	White	125.00	105.00



## MG Weather Resistant Foreground/Background Speaker Pair

This quality speaker pair is designed to provide excellent sound quality in commercial or home music installations. Wedge shape and included "U" bracket allows easy mounting on walls, from the ceiling, or in corners. Sealed reinforced polypropylene housing and high power capacity make these suitable in demanding applications, indoors or out. Aluminum grills and brackets will not rust. 5" mica cone woofer and 1/2" dome tweeter offer 45Hz~22KHz frequency response, 75W/150W nominal/max power capacity and 90dB sensitivity. Models with built-in 70V/25V line transformer include an external rotary selector for 5, 10, 15, 20 and 30 watt taps or 8ohm use. Great for multi-speaker commercial applications. Dimensions: 9 3/4" (H) x 7 1/4" (W) x 5 1/4" (D). **Sold in pairs.**

Order #	Color	(1-3 prs.)	(4 prs.-up)
<b>Without Transformer</b>			
50-5977	Black	\$89.99	\$84.95
50-5978	White	89.99	84.95
<b>With Transformer</b>			
50-5982	Black	105.00	98.95
50-5983	White	105.00	98.95





NEW!

### MCM CUSTOM AUDIO 5½" Two Way Outdoor "Rock" Speaker



These simulated rocks will add a distinctive look to any outdoor landscaping arrangement, while providing outstanding music fidelity. Fully sealed enclosures are designed to provide years of trouble free service, and may be permanently installed and exposed to weather year round. **Features:**

•50W RMS power capacity •5½" injected polypropylene cone woofer •13mm mylar tweeter •75Hz~20KHz frequency response •87dB sensitivity •8ohm impedance •Dimensions: 9.64" x 10.25" x 9.05"

Order #	MSRP	ONLY
50-10530	\$59.95	\$49.99

NEW!

### MCM CUSTOM AUDIO 6½" Two Way Outdoor "Rock" Speaker




These simulated rocks will add a distinctive look to any outdoor landscaping arrangement, while providing outstanding music fidelity. Fully sealed enclosures are designed to provide years of trouble free service, and may be permanently installed and exposed to weather year round. **Features:**

•60W RMS power capacity •6½" injected polypropylene cone woofer •13mm mylar tweeter •High-quality 6dB crossover •60Hz~20KHz frequency response •87dB Sensitivity •8ohm impedance •Dimensions: 11.02" x 10.63" x 12.60"

Order #	MSRP	ONLY
50-10535	\$89.95	\$59.99

NEW!

### MCM CUSTOM AUDIO 8" Two Way Outdoor "Rock" Speaker

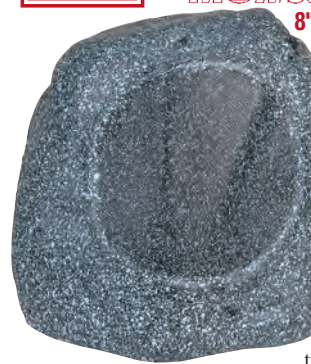

These simulated rocks will add a distinctive look to any outdoor landscaping arrangement, while providing outstanding music fidelity. Fully sealed enclosures are designed to provide years of trouble free service, and may be permanently installed and exposed to weather year round. **Features:**

•70W RMS power capacity •8" injected polypropylene cone woofer •25mm mylar tweeter •High-quality 12dB crossover •55Hz~20KHz frequency response •88dB sensitivity •8ohm impedance •Dimensions: 13.39" x 11.03" x 12.21"

Order #	MSRP	ONLY
50-10540	\$109.00	\$79.99

### MCM CUSTOM AUDIO



#### Indoor/Outdoor Speaker with 70V Transformer

Full range speaker is compatible with conventional 8ohm home audio, as well as commercial 70V distributed systems. Treated dual cone driver provides outstanding sound quality with high immunity to moisture

and humidity. It is perfect in home or commercial installations, for background music, paging, and general public address applications on patios, poolside, outdoor restaurants etc. Included heavy duty mounting bracket allows easy wall, floor or ceiling mounting, and unique dispersion lens provides even 360° sound distribution. Recessed rotary switch allows easy selection of multiple transformer taps, 8ohm position fully bypasses transformer, allowing maximum frequency response in home systems. **Specifications:** •Power capacity: 20W RMS •Frequency response: 80Hz~20KHz (excluding transformer) •Transformer taps: 2.5W, 5W, 10W, 20W •SPL: 90dB 1W/1M •Driver: 6½" dual cone •Magnet size: 10 oz. •Dimensions: 8" (dia.) x 10" (H)

Order #	MSRP	(1-3)	(4-up)
50-572	\$69.95	\$39.99	\$38.75




### MCM CUSTOM AUDIO Two-Way Monitor Speaker

Heavy-duty ABS speaker system features a soft dome tweeter, and high excursion 8" woofer, and is capable of delivering 30Hz~20KHz frequency response. Internal 70V transformer allows compatibility with distributed

commercial systems, and 8ohm bypass provides full frequency response. **Specifications:** •Power capacity: 75W/150W RMS/peak •Impedance: 8ohm •Transformer taps: 5W, 10W, 15W, 20W and 30W •Dimensions: 15½" (H) x 10" (W) x 9" (D) •Black color •Sold individually

Order #	MSRP	(1-3)	(4-up)
555-1864	\$199.00	\$125.00	\$110.00

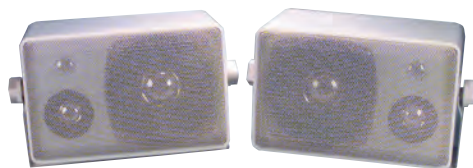

### MG Weather Resistant Foreground/Background Speaker Pair

- ✓4" woofer
- ✓6ohm use only
- ✓Includes mounting brackets

This quality speaker pair is ideal for use on decks, patios, automobiles or in surround sound applications. Included "U" brackets allow easy mounting on walls or from the ceiling. Moisture and weather resistant housing, and polypropylene components allow use indoors or out. 4" long excursion woofer, 2" midrange and ¾" tweeter offer 90Hz~20KHz frequency response, 25W/40W RMS/peak power capacity and 85dB sensitivity. Dimensions: 7½" (H) x 4¾" (W) x 4¾" (D). 4~8ohm compatible. Nominal impedance 6ohm. **Sold in pairs.**

Order #	Color	(1-3 prs.)	(4 prs.-up)
50-5995	Black	\$31.99	\$29.95
50-5996	White	31.99	29.95



### OMNI MOUNT Audio Basics Ceiling/Wall Speaker Mounts

The perfect value oriented companion to home theater and audio applications for mounting front, center, or rear channel speakers to either

wall or ceiling. The AB2 is for larger satellite and small bookshelf speakers, weighing up to 8 lbs. Each is made of durable, weather resistant fiber reinforced polymer, and includes all mounting hardware and correct drill bit, for perfect installation every time. Each model is available in black or white, and is sold individually. Specially priced five-packs are available or traditional 5.1 audio systems. **Limited quantities.**

Order #	Model	Set	Color	ONLY
50-7450	AB2	Single	Black	\$17.99
50-7451	AB2	Single	White	17.99
50-7455	AB2-HTS	Five pack	Black	59.99



#50-7411



#50-7410



#50-7415



#50-7425



#50-7430

### OMNI MOUNT Stainless Steel Series Speaker Mounts

Designed for heavier systems, these mounts are perfect for everything from surround and satellite speakers, foreground speakers and studio monitors. Unique ball and clamp design allows wide range of movement, with secure positioning of heavy

speakers. Stainless steel hardware ensures strength, durability and all weather use. Available in wall or ceiling mount versions, with weight capacity from 5 lbs. to 20 lbs., a model is available to suit any need. 5 lb. versions include hardware for wall or ceiling mount, all others must be specified. Available in black, white or gray, mounts are sold individually and include all mounting hardware and correct drill bit, for perfect installation every time. **Sold individually.**

Order #	Weight Capacity (lbs.)	Type	Color	ONLY
50-7410	5.0	Wall/ceiling	Black	\$18.99
50-7411	5.0	Wall/ceiling	Gray	18.99
50-7412	5.0	Wall/ceiling	White	18.99
50-7415	10.0	Wall	Black	22.99
50-7425	20.0	Wall	Black	30.99
50-7430	20.0	Ceiling	Black	30.99
50-7431	20.0	Ceiling	White	30.99



**Dipolar Rear Channel Speaker**

- ✓ Dipolar design
- ✓ Dual 5 1/2" woofers
- ✓ Simulated black ash vinyl veneer

Dual woofers and dual tweeters, arranged in a di-polar configuration, make this speaker perfect for surround channel applications. Positioned at the rear, directly at the left and right of the listening position, these speakers provide the outstanding imaging intended for 5.1, THX and Dolby Digital systems. They are also great for compact systems in conventional two channel stereo environments. **Features:** •Dual 5 1/2" woofers •Dual 1/2" mylar dome tweeters with specially designed dispersion lens •Dual front ports •Attractive simulated black ash vinyl veneer enclosure with removable black grills •Wall mount hanger •Color coded push terminals which accept up to 16AWG wire **Specifications:** •Power capacity: 50W/100W RMS/peak •Frequency response: 80Hz~20KHz •Impedance: 8ohm •Dimensions: 11" (H) x 11" (W) x 6 1/2" (D) •**Sold individually**

Order #	MSRP	(1-3)	(4-up)
50-6855	\$69.95	\$32.99	\$29.95

**Indoor/Outdoor Speaker Pairs**

Highly versatile speakers include a base stand for bookshelf use, and a "U" bracket for wall mounting. Their rugged enclosures and stainless steel hardware make these suitable for outdoor use, while the superior quality components provide outstanding performance expected of a pair of bookshelf speakers. **Features:** •6 1/2" poly woofer with rubber surround •13mm mylar tweeter •Gold plated connections **Specifications:** •Power capacity: 50W RMS •Frequency response: 55Hz~20KHz •Sensitivity: 89dB (W/M) •Impedance: 8ohm •Dimensions: 13" (H) x 7 1/2" (W) x 7" (D) •**Sold in pairs**

Order #	Model #	Color	ONLY
50-4670	BA-6500B	Black	\$79.99
50-4671	BA-6500W	White	79.99

**Single Stereo Indoor/Outdoor Speaker**

Often times a pair of outdoor speakers is impractical or undesired. In some areas, actual stereo imaging may not be a possibility, yet both channels need to be heard. This speaker features a dual voice coil woofer and two tweeters, allowing it to provide both left and right channels from a single point. Highly versatile speakers include a base stand for bookshelf use, and a "U" bracket for wall mounting. Their rugged enclosures and stainless steel hardware make these suitable for indoor or outdoor use. **Features:** •6 1/2" poly woofer with rubber surround •Dual 13mm mylar tweeters •Gold plated connections **Specifications:** •Power capacity: 40W RMS (each channel) •Frequency response: 60Hz~20KHz •Sensitivity: 88dB (W/M) •Impedance: 8ohm (each channel) •Dimensions: 13" (H) x 7 1/2" (W) x 7" (D) •**Sold individually**

Order #	Model #	Color	ONLY
50-4672	BA-650-OSB	Black	\$105.00
50-4673	BA-650-OSW	White	105.00

**Center Channel Speaker System**

- ✓ Simulated black ash vinyl veneer
- ✓ 1/2" mylar dome tweeter
- ✓ Dual 4" woofers

Attractive center channel speaker features simulated black ash vinyl veneer, and a partially transparent, removable black grill. Intended to be a perfect match to model #50-9085 bookshelf speakers, this speaker will blend beautifully with any existing system. **Features:** •Dual poly cone 4" woofers, with single piece concave cone, and rubber surrounds •1/2" mylar dome tweeter •Rear ported enclosure **Specifications:** •Power capacity: 80W/120W RMS/peak •Frequency response: 50Hz~20KHz •Sensitivity: 88dB (W/M) •Impedance: 8ohm •Dimensions: 6" (H) x 17.75" (W) x 6.5" (D) •**Sold individually**

Order #	MSRP	(1-3)	(4-up)
50-9080	\$39.95	\$29.99	\$26.95

**Center Channel Speaker System**

- ✓ Stunning high gloss finish
- ✓ 1" soft dome tweeter
- ✓ Dual 5 1/2" woofers

Beautifully crafted speaker system intended to be a perfect match to Model #50-9075 bookshelf speakers, this speaker will blend beautifully with any existing system. **Features:** •1" soft dome tweeter •Rear ported enclosure **Specifications:** •Power capacity: 125W/275W RMS/peak •Frequency response: 70Hz~20KHz •Sensitivity: 87dB (W/M) •Impedance: 8ohm •Dimensions: 6.3" (H) x 16.5" (W) x 7.9" (D) •**Sold individually**

Order #	MSRP	(1-3)	(4-up)
50-9070	\$199.00	\$99.99	\$93.50

**ARTDio 5.1 Digital Sound Bar**

The Kinyo ArtDio® amplified sound bar with matching subwoofer delivers 5.1 audio with surprising performance and surround effect. The sound bar measures 31 1/2" wide, and houses five 3" full range drivers, each driven by independent amplifier channels. The drivers are specifically positioned within the enclosure to provide three-dimensional realism amazingly similar to speakers surrounding the listener. A separate active subwoofer features an 8" driver in a tuned ported enclosure, and is powered by its own 60W amplifier. The internal decoder supports Dolby® Digital, DTS®, Dolby® Pro-Logic® II and accepts both Toslink and coaxial digital inputs. It is a perfect match for flat panel monitors in areas where an overly involved home theater system is not desired or practical. **Features:** •Two optical and two coaxial inputs •Two analog L/R stereo inputs •Discrete six channel 5.1 input •Included 21 button IR remote control •Backlit LCD display showing settings, functions and operation •Includes connecting cables required for most applications, and wall mount hardware **Specifications: sound bar:** •Power output: 12W five channels •Dimensions: 5.51" (H) x 31.5" (W) x 5.12" (D) **Subwoofer:** •Power output: 60W •Dimensions: 15.35" (H) x 7.48" (W) x 13.39" (D) •Power requirements: 120VAC, 60Hz, 240W. •Mfr. #HT-1037

Order #	MSRP	ONLY
50-9300	\$349.95	\$299.00

**Bookshelf Speaker Pair**

- ✓ Simulated black ash vinyl veneer
- ✓ 1/2" mylar dome tweeter
- ✓ 4" woofer

Attractive speaker pair features simulated black ash vinyl veneer, and a partially transparent, removable black grill. Intended to be a perfect match to model #50-9080 center channel speaker, they are perfectly suitable as front or rear speakers in any home theater environment. **Features:** •Poly cone 4" woofer, with single piece concave cone, and rubber surround •1/2" mylar dome tweeter •Rear ported enclosure **Specifications:** •Power capacity: 60W/120W RMS/peak •Frequency response: 60Hz~20KHz •Sensitivity: 87dB (W/M) •Impedance: 8ohm •Dimensions: 9.5" (H) x 6" (W) x 6.5" (D) •**Sold in pairs**

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-9085	\$49.95	\$36.99	\$34.95

**Bookshelf Speaker Pair**

- ✓ Stunning high gloss finish
- ✓ 1" soft dome tweeter
- ✓ 5 1/2" woofer with phase plug

Beautifully crafted speaker pair features a high gloss piano black finish that is sure to compliment any décor. Intended to be a perfect match to model #50-9070 center channel speaker, they are perfectly suitable as front or rear speakers in any home theater environment. **Features:** •5 1/2" poly cone woofer, with rubber surround and steel phase plug •1" soft dome tweeter •Rear ported enclosure **Specifications:** •Power capacity: 75W/225W RMS/peak •Frequency response: 49Hz~20KHz •Sensitivity: 88dB (W/M) •Impedance: 8ohm •Dimensions: 9.9" (H) x 6.3" (W) x 7.9" (D) •**Sold in pairs**

Order #	MSRP	(1-3 prs.)	(4 prs.-up)
50-9075	\$249.00	\$119.00	\$109.00

**Active 10" Subwoofer**

This down-firing active subwoofer features a highly efficient 100W amplifier, long throw 10" low frequency driver and flared front port, for excellent low frequency response. Its subdued simulated black ash finish will complement any décor. This unit is an ideal addition with any home theater speaker system that utilizes 6~8" woofers. **Features:** •Ported 10" MDF cabinet •0°/180° phase selector •Line level inputs, with feedthrough outputs •Speaker level inputs, with high pass satellite speaker outputs •Lighted rocker power switch •Included speaker spikes **Specifications:** •Output power: 100W/150W RMS/peak •Frequency response: 30~180Hz •Variable crossover range: 20~180Hz •Power requirements: 110VAC, 60Hz •Dimensions (excluding spikes): 14" (H) x 13.75" (W) x 14.5" (D).

Order #	MSRP	ONLY
50-7660	\$199.00	\$69.99



# Section 3 Home Audio/Theater



**Sherwood**

**Dolby® Digital TrueHD 7.1 Receiver**

- ✓100W x 7CH dual zone receiver
- ✓HDMI 1.3 repeater with 3 in and 1 out
- ✓Dolby Tru-HD and DTS Master Audio HD

This Blue Tooth and Sirius ready receiver provides 100W per channel with no more than 0.2% THD into 8ohm for each of seven channels. **Features:** HDMI 1.3 repeater • Lossless audio • DTS master audio HD • Dolby TrueHD • DTS 96/24/ES/Neo6 • Dolby DPLIIx • DSD (SACD) • LMP (DVD-A) • Totally discrete amplifier stage for all channels • Eight DSP surround modes • 192KHz/24 bit D/A converters for all channels • Digitally remasters PCM to 96KHz/24 bit • Multi-source, dual zone operation • 7.1 channel direct input • Automatic speaker set-up with supplied microphone • SNAP™ room EQ • Quadruple crossover • A/V synch delay by input • Three A/V inputs and two A/V outputs • Universal video up conversion • Two component video inputs • Component video output • Three HDMI inputs • One HDMI output • Eight analog inputs (including tuner) • Analog output • Composite and S-video with three inputs and two outputs • Four digital inputs (two coaxial and two optical) • Optical digital output • Multi-stage dynamic range control • Cinema EQ • Tone direct • Speaker on/off switch • Color coded speaker terminals • Quartz PLL synthesized AM/FM tuning • Sirius ready • 30AM/FM tuner presets • Preprogrammed IR remote control • Blue tooth front panel receptacle for optional receiver • Model #RD-7503

Order # **50-5390** **ONLY \$379.00**



**Sherwood**

**Dolby® Digital 5.1 Receiver**

- ✓100W x 5CH receiver
- ✓2 x 1 HDMI repeater/switcher
- ✓Dolby Digital EX, DPLII

This receiver provides 100W per channel, with no more than 0.2% THD into 6ohm for each of five channels. **Features:** • Dolby Digital EX • DPLII • Totally discrete amplifier stage for all channels • Three DSP surround modes • 192KHz/24 bit D/A converters for all channels • 5.1 channel direct input • Automatic speaker set up with supplied microphone • SNAP™ Room EQ • Three A/V inputs and two A/V outputs • Two component video inputs • Component video output • 2 x 1 HDMI switching, plus repeater for extended cable length • Front panel receptacle for optional Blue Tooth receiver • Three analog inputs (including tuner) • One analog output • Three composite video inputs and two composite video outputs • Three digital inputs (two coaxial and one optical) • Multi-stage dynamic range control • Cinema EQ • Tone direct • Speaker on/off switch • Color coded speaker terminals • Quartz PLL synthesized AM/FM tuning • 30 AM/FM tuner presets • Model #RD-6504

Order # **50-5395** **ONLY \$229.00**



**Sherwood**

**Dolby® Digital 5.1 Receiver**

- ✓100W x 5CH receiver
- ✓2 x 1 HDMI switcher
- ✓Dolby Digital EX, DPLII

This receiver provides 100W per channel, with no more than 0.2% THD into 6ohm for each of five channels. **Features:** • Dolby Digital EX • DPLII • Totally discrete amplifier stage for all channels • Three DSP surround modes • 192KHz/24 bit D/A converters for all channels • 5.1 channel direct input • Automatic speaker set up with supplied microphone • SNAP™ Room EQ • Three A/V inputs and two A/V outputs • Two component video inputs • Component video output • 2 x 1 HDMI switching • Front panel receptacle for optional Blue Tooth receiver • Three analog inputs (including tuner) • One analog output • Three composite video inputs and two composite video outputs • Three digital inputs (two coaxial and one optical) • Multi-stage dynamic range control • Cinema EQ • Tone direct • Speaker on/off switch • Color coded speaker terminals • Quartz PLL synthesized AM/FM tuning • 30 AM/FM tuner presets • Model #RD-6504

Order # **50-5400** **ONLY \$179.00**



**Sherwood**

**Stereo Receiver**

Straight-forward AM/FM receiver features outstanding tuner sensitivity, multiple component inputs, and a solid, discrete output, 100W RMS x two channel stereo amplifier. Additionally, the included remote control operates the relay switching for the A/B speaker outputs. **Features:** • AM/FM stereo tuning with 30 station presets • Large fluorescent display • Included 25 key IR remote control • Four line level inputs (plus tuner) • Digital encoder volume control • Headphone jack • Sleep timer **Specifications:** • THD: <0.08%, 20Hz~20KHz @ 8ohm • S/N ratio: >90dB • IHF FM tuner sensitivity: 17.2dBf • FM frequency response: 40Hz~12KHz • AM tuner sensitivity: 800µV/m • AM frequency response: 100Hz~2.3KHz • Dimensions: 4 7/8" (H) x 17 1/2" (W) x 14" (D)

Order # **50-7805** Mfr. # **RX-4105** **ONLY \$99.99**



**Sherwood**

**Stereo Receiver**

Straight-forward AM/FM receiver features outstanding tuner sensitivity, multiple component inputs, and a solid, discrete output, 100W RMS x two channel stereo amplifier. **Features:** • AM/FM stereo tuning with 30 station presets • Large fluorescent display • Included IR remote control • Four line level inputs (plus tuner) • Digital encoder volume control • Headphone jack • Sleep timer • Mfr. #RD-4109

Order # **50-7806** **ONLY \$109.00**



**Sherwood**

**Five Disc Carousel CD Changer**

Front loading multi-disc player features a one-bit twin D/A convertor, random sequential play, and bright fluorescent display with music calendar. **Other features include:** • Coaxial digital output • 8x oversampling • Three beam laser pick-up • Headphone output with volume control • Compatibility with Sherwood Digi-Link remote control system • Mfr. #CDC-5090R

Order # **50-6321** **ONLY \$194.00**



**PYLE PRO**

**Dual Cassette Deck**

Dual cassette deck is the perfect addition to any home theater system requiring tape capability. Included mounting hardware also allows the unit to be easily installed in a standard 19" equipment rack. **Features:** • Dynamic noise reduction • Normal and high speed dubbing • CrO2 and normal tape selector • Three digit tape counter • LED level meters • Capability for use with IR remote when used with the matching PT600A integrated amplifier • 110/220V switchable power input • Dimensions (excluding rack ears): 5.5" (H) x 16.5" (W) x 9" (D) • Mfr. #PT649D

Order # **50-6650** (1-3) **\$93.99** (4-up) **\$92.95**



**PYRAMID**

**AM/FM Digital Tuner**

The ideal mate for the PR330A Stereo Amplifier, this quartz locked tuner is compatible with any amplifier with line level inputs. The IR remote control included with the PR330A will operate this tuner. **Features include:** • Bright fluorescent digital display • 20 station memory • Auto station scanning • Signal lock indicator • RCA pre-amp out • Included AM and FM antennas • Dimensions: 16" (W) x 4" (H) x 9" (D) • Black color • Mfr. #PR33T

Order # **50-6045** (ea.) **\$79.99** (2-up) **\$70.95**

**MCM**

**Rear Panel A/V Extenders**



Easily connect and re-connect video games, camcorders and portable audio/video devices to your television's audio/video inputs without having to turn the television around each time. These extenders will save your back from strains and virtually eliminate the danger of dropping your television every time you plug into the A/V inputs. Standard A/V inputs via "RCA" type jacks on the front or side of your television and "RCA" type plugs for the rear. Available with S-video capability for such equipped devices.

Order # **24-6595** Description **A/V and S-video (shown)** (ea.) **\$14.99** (2-4) **\$13.50** (5-up) **\$12.00**  
24-6600 A/V only **12.99** **11.50** **10.75**

SONY

NEW!



### 7.1 Channel Home Theater A/V Receiver

- ✓1080p Video Switching
- ✓7.1 Channel Audio

Get amazing 1080p video and 7.1 channels of pristine surround sound. This versatile audio/video receiver features HDMI™ 1080/24p capability to help you get the most from Blu-ray Disc™ movies. Also enjoy built-in XM and PMP connections. **Features:** •HDMI™ 1080/24p •A/V Sync •Digital Cinema Sound™ •Digital media port •Dolby® Digital Decoding, Dolby® Pro Logic® II Decoding, Dolby® Digital EX Decoding, Dolby® Pro Logic® IIX Decoding, dts® 96/24 Decoding, dts® NEO:6 Decoding, dts® ES Decoding and Dolby® Pro Logic® decoding •XM connect and play ready **Inputs:** •One composite video input, five optical audio inputs, three coaxial audio inputs, five RCA audio inputs, three component video input and four 1080p HDMI™ inputs **Outputs:** •Three composite video output, one component video output and one 1080p HDMI™ connection, one subwoofer output, one antenna terminal (AM loop), one antenna terminal (FM 75ohm), one headphone output **Speaker terminal type:** •Screw binding posts (A & B)

Order #	(1-9)	(10-up)
STR-DG1200	\$879.00	\$861.42



SONY

### STR-DH500 Home Theater A/V Receiver

Get amazing 1080p video and 5.1 channels of pristine surround sound. This versatile audio/video receiver features HDMI™ "Pass-through" and 1080/24p capability to help you get the most from Blu-ray Disc™ movies. **Features:** •100W x 5 channels •HDMI™ pass-through •A/V sync •Digital Cinema Sound™ •Dolby® Digital Decoding, Dolby® Pro Logic® II Decoding, Dolby® Digital EX Decoding, Dolby® Pro Logic® IIX Decoding and Dolby® Pro Logic® Decoding **Inputs:** •Three 1080p HDMI™ •Three component video •Digital media port •Two composite video •Two optical audio •Coaxial audio •Four RCA audio •Antenna terminal (AM loop) •Antenna terminal (FM 75ohm) **Outputs:** •1080p HDMI™ connection •Component video •Composite video •Subwoofer •Headphone **Speaker terminal type:** •Front: Banana •Rear and center: Push

Order #	(1-9)	(10-up)
STR-DH500	\$199.00	\$195.02



### SONY Five Disc DVD Changer with HDMI™ and 1080p Upscaling

The DVP-NC800H is the five disc DVD/CD player solution your home theater has been waiting for. Enjoy your DVD collection, upscaled to gorgeous 1080p via the HDMI™ connection. Plus, with BRAVIA® Sync, you can easily power on and sync the inputs of compatible Sony AV devices connected to the players via HDMI for hassle-free enjoyment. Includes AV cable and remote control with batteries. **Features:** •High resolution jpeg output •Precision cinema progressive™ technology •12 bit/108MHz video DAC •Multi disc resume •Multi brand TV remote control

Order #	(1-9)	(10-up)
DVP-NC800H/B	\$129.00	\$127.00

NEW!



### SONY STR-DN1000 7.1 Channel Home Theater A/V Receiver

Get amazing 1080p video and 7.1 channels of pristine surround sound. This versatile audio/video receiver features full HD 1080 experience. With 1080/24p capability you get the most from Blu-ray Disc™ movies. **Features:** •110W x 7 channels •S-Air capability •On screen GUI •A/V sync •Digital Cinema Sound™ •Dolby® Digital Decoding, Dolby® Pro Logic® II Decoding, Dolby® Digital EX Decoding, Dolby® Pro Logic® IIX Decoding and Dolby® Pro Logic® Decoding **Inputs:** •4 x 1080p HDMI™, 3 x component video, digital media port, 4 x composite video, 2 x optical audio, coaxial audio, 5 x RCA audio, antenna terminal (AM loop) and antenna terminal (FM 75ohm) **Outputs:** •1080p HDMI™ connection, component video, composite video, 2 x RCA audio, subwoofer, and headphone **Speaker terminal type:** •Screw

Order #	(1-9)	(10-up)
STR-DN1000	\$499.00	\$492.00



SONY

### STR-DH800 7.1 Channel Home Theater A/V Receiver

Get amazing 1080p video and 7.1 channels of pristine surround sound. This versatile audio/video receiver features full HD 1080 experience. With 1080/24p capability you get the most from Blu-ray Disc™ movies. **Features:** •110W x 7 channels •S-Air capability •A/V Sync •Digital Cinema Sound™ •Dolby® Digital Decoding, Dolby® Pro Logic® II Decoding, Dolby® Digital EX Decoding, Dolby® Pro Logic® IIX Decoding and Dolby® Pro Logic® Decoding **Inputs:** •4 x 1080p HDMI™, 3 x component video, digital media port, 4 x composite video, 2 x optical audio, coaxial audio, 5 x RCA audio, antenna terminal (AM /loop) and antenna terminal (FM 75ohm) **Outputs:** •1080p HDMI™ connection, component video, composite video, 2 x RCA audio, subwoofer, and headphone **Speaker terminal type:** •Front: Screw •All others: Push

Order #	(1-9)	(10-up)
STR-DH800	\$399.00	\$391.02



NEW!

### SONY Wireless Network Audio System

Enjoy audio files stored on your home or office computer with the CPF-IX001 wireless streaming music system. Once you add power and an ethernet connection, you're ready to directly access your entire library of music on your PC. This compact device features a unique subwoofer and digital amplifier technology which will fill your room with high-quality sound.

Order #	(1-9)	(10-up)
CPF-IX001	\$249.00	\$244.02



## Home Audio/Theater

Section

3



NEW!

SONY

### STR-DH700 Home Theater A/V Receiver

Get amazing 1080p video and 7.1 channels of pristine surround sound. This versatile audio/video receiver features full HD 1080 experience. With 1080/24p capability you get the most from Blu-ray Disc™ movies. **Features:** •105W x 7 channels •S-Air capability •A/V Sync •Digital Cinema Sound™ •Dolby® Digital Decoding, Dolby® Pro Logic® II Decoding, Dolby® Digital EX Decoding, Dolby® Pro Logic® IIX Decoding and Dolby® Pro Logic® Decoding **Inputs:** •3 x 1080p HDMI™, 3 x component video, 1 x digital media port, 4 x composite video, 2 x optical audio, 1 x coaxial audio, 5 x RCA audio, 1 antenna terminal (AM loop) and 1 antenna terminal (FM 75ohm) **Outputs:** •1080p HDMI™ connection, component video, composite video, subwoofer, and headphone **Speaker terminal type:** •Front: Screw •All others: Push

Order #	(1-9)	(10-up)
STR-DH700	\$299.00	\$293.02



NEW!

SONY

### STR-DH100 Audio Receiver

Enjoy bolder, quality sound without the fuss. The solid, 2-channel STR-DH100 stereo receiver delivers clear stereo sound for everyday music fans and rooms where a complex home theater system is not needed. With the right mix of inputs and technologies, the STR-DH100 transforms any secondary living environment into a concert hall. In addition, it also includes the Digital Media Port input that allows you to extend your music selection from an iPod®, Walkman® digital music player, Bluetooth® device or from a PC (accessories sold separately). **Features:** •100W x 2 channels •5 audio inputs and 2 audio **Inputs:** 5 x RCA audio, antenna terminal (AM loop) and antenna terminal (FM 75ohm) **Outputs:** 2 x RCA audio and headphone **Speaker terminal type:** •A & B: Spring clip

Order #	(1-9)	(10-up)
STR-DH100	\$149.00	\$146.02

Follow us on:

MCMelectronics.com



page

59

Product Questions Email: tech@MCMelectronics.com

Email: quotes@MCMelectronics.com



# Section 3 Home Audio/Theater



## SONY Home Entertainment Server

Provide endless home entertainment with this unique multimedia server. Equipped with a 200 Blu-Ray Disc™ changer and a 500Gb hard drive, it is the ultimate media organization solution for your digital movies, music and photos in one attractive, stand-alone device. **Features:** •Hard drive can hold up to: 137 hours of video, 2000 music albums, or 20,000 photos •Dolby® TrueHD decoder built-in •Music streaming: Enjoy music in multiple rooms using DLNA compliant clients, such as the separately available CPF-IX001

wireless PC audio system •Multi brand TV remote control

Order #	(1-9)	(10-up)
HES-V1000	\$3459.00	\$3389.82



## SONY Progressive Scan DVD Player

Sony's DVP-SR200P is a versatile DVD player with many features at an affordable price. It delivers excellent picture and sound quality so you get the most out of your movies. The "Precision Drive 3" system allows you to playback some DVDs that may have been damaged or warped without a degradation of picture quality. **Features:** •Mp3 playback •12 bit/108MHz video DAC •Multi disc resume (six discs) •Multi brand TV remote control

Order #	ONLY
DVP-SR200P/B	\$39.99



## SONY DVD Recorder/VCR Combo with HDMI™ and 1080p Upscaling

The RDR-VX560 DVD Recorder/VCR combo is just what your cable box ordered. Save your favorite TV shows, archive old VHS tapes, even burn photos and personal video from Sony USB-based camcorders and digital cameras with ease. You'll also appreciate its convenient ability to bring DVD-recording into your living room. Includes AV cable and remote control with batteries. Unit is black. **Features:** •Jpeg and mp3 playback •Cable box/satellite receiver control through IR blaster •BRAVIA™ Sync •Two-way "One Touch Dubbing" from VCR to DVD or reverse •Multi brand TV remote control

Order #	(1-9)	(10-up)
RDR-VX560	\$231.00	\$229.99



## SONY HD Radio™ Receiver

Experience more choices, crystal clear sound, and no subscription fees. Enjoy music the way it was meant to be heard with AM stations that can deliver FM sound quality and FM stations that sound like your favorite CDs. With static-free sound and an easy-to-read dot matrix LCD for viewing important information, the XDR-F1HD receiver is the perfect choice for adding HD radio reception to a home audio system. Includes remote control.

Order #	(1-9)	(10-up)
XDR-F1HD	\$99.99	\$97.95



## SONY BDP-S360 Blu-Ray Disc Player

Experience the next wave of home entertainment with this Blu-ray Disc™ player, featuring Dolby® TrueHD™ and BD-Live compatibility. This player also outputs a full 1080/24p true cinema picture, plus upscales your existing DVD collection to 1080p when using the HDMI™ connection. Superior picture quality isn't the only thing you'll notice, the BDP-S360 comes with Dolby® TrueHD™ which delivers sound as stunning as the high definition picture itself. Bringing it all together is the new icon based Xcross Media Bar, which provides simple navigation of the player's menu system. **Features:** •DVD upscale to 1080p •Dolby® TrueHD decoder built-in •BD-Live Technology •BRAVIA™ sync •Multi brand TV remote control

Order #	ONLY
BDP-S360	\$179.00



## SONY BDP-S560 Blu-Ray Disc Player

Experience the next wave of home entertainment with this Blu-ray Disc™ player, featuring Dolby® TrueHD™ and BD-Live compatibility. This player also outputs a full 1080/24p true cinema picture, plus upscales your existing DVD collection to 1080p when using the HDMI™ connection. Superior picture quality isn't the only thing you'll notice, the BDP-S560 comes with Dolby® TrueHD™ which delivers sound as stunning as the high definition picture itself. Bringing it all together is the new icon based Xcross Media Bar, which provides simple navigation of the player's menu system. **Features:** •802.11n wireless Technology •DVD upscale to 1080p •Dolby® TrueHD decoder built-in •7.1 Analog audio output •Ethernet port •Multi brand TV remote control •Photo streaming

Order #	(1-9)	(10-up)
BDP-S560	\$349.00	\$342.02



## COBY Portable HD Radio System

Introducing the Coby HDR-700 portable HD radio system featuring a splash-proof housing that allows for indoor or outdoor use. Enjoy crystal-clear digital broadcasts anytime, anywhere with no subscription fees in high-

definition audio. **Features:** •HD radio tuner receives crystal clear digital broadcasts with no subscription fees •Receives AM/FM analog broadcasts •Ten AM and ten FM radio station preset memory •High-contrast LCD display with backlight •Integrated rechargeable battery provides up to five hours of play time •Splash-proof housing allows for indoor or outdoor use •Integrated full-range speaker system •3.5mm audio line-in jack for use with any portable audio device •3.5mm headphone jack **Included accessories:** •UL AC adapter •AM loop antenna

Order #	ONLY
80-7245	\$149.00



## COBY 1080p Upconversion DVD Player with HDMI and DivX® Playback

This progressive scan DVD player combines traditional features with the most cutting-edge in digital video, all in an ultra-slim package. An HDMI output converts your video to near-HD quality for a premium viewing experience. Enjoy DVD discs, play DivX® digital video, or access your digital media directly from USB/SD cards. Dolby digital audio provides a dynamic range of sound, while multiple AV outputs allow for quick and easy connection to your home theater system. **Features:** •Progressive scan DVD player with 1080p video output for use with full HD-capable TVs •Upconverts DVD video to near-HD quality (1080p) •DVD, DVD±R/RW, CD, CD-R/RW, and JPEG compatible •Official DivX® certified product •Plays all versions of DivX® video (including DivX® 6) with standard playback of DivX® media files •Plays digital MPEG-4 video files (XviD) •Plays digital media files directly from USB drives and SD/MMC cards •Dolby digital decoder •HDMI output for perfect digital signal transmission to home theater systems over a single cable •Digital and analog AV outputs for home theater use •NTSC/PAL compatible •Convenient front panel and on-screen display •Multiple language, subtitle, and camera angle support •Parental lock control •100~240VAC automatic power switching •FCC approved and ETL listed **Included accessories:** •Remote control •Two "AAA" batteries •AV cable

Order #	ONLY
80-7195	\$49.99



## COBY Compact DVD Player

For optimal performance in a compact package, the DVD player is unbeatable. This progressive scan DVD player offers the best available features in a streamlined design, with Dolby® Digital decoding, AV outputs for home theater connection, and multi-function onscreen display that lets you customize the player to fit your needs.

**Features:** •Progressive scan DVD player •Compact and slim design •DVD, DVD±R/RW, CD, CD-R/RW, and jpeg compatible •Dolby® Digital decoder •Digital and analog AV outputs for home theater use •NTSC/PAL compatible •Convenient on-screen display •Multiple language, subtitle, and camera angle support •Picture zoom function •Parental lock control •100~240VAC automatic power switching •FCC approved and ETL listed **Included accessories:** •Remote control •Two "AAA" batteries •AV cable

Order #	ONLY
80-7190	\$29.99



## COBY Component HD Radio Receiver

Introducing the Coby HDR-650 component HD radio receiver. This sharp HD radio receiver features brushed aluminum casing designed to complement your other components with style. Enjoy crystal-clear digital broadcasts with no subscription fees in high-definition audio. **Features:** •HD radio tuner receives crystal clear digital broadcasts with no subscription fees •Receives AM/FM analog broadcasts •Ten AM and ten FM radio station preset memory •High-contrast LCD display with backlight •Brushed aluminum casing designed to complement your other components in style •Stereo RCA connectors for use with home audio systems •3.5mm headphone jack •Full function remote control **Included accessories:** •UL AC adapter •AM loop antenna •FM wire antenna •AV cable •Remote control

Order #	ONLY
80-7240	\$99.49



## COBY® 5.1-Channel DVD Home Theater System

Coby's DVD765 system brings together high-tech features, Dolby® Digital audio and stylish design for the ultimate home theater experience. Compatible with all standard disc formats, this progressive scan DVD player features a super-slim design that fits easily into your home. Five full-range satellite speakers and subwoofer with tuned port deliver pounding bass and crisp highs: 300W of dynamic audio in 5.1-channel surround sound. **Features:** •5.1-channel progressive scan DVD player •Compact and slim design •DVD, DVD±R/RW, CD, CD-R/RW, and JPEG compatible •Dolby® digital decoder •5.1-channel audio for surround sound systems •Digital and analog AV outputs for home theater use •NTSC/PAL compatible •Convenient front panel and on-screen display •Multiple language, subtitle, and camera angle support •Picture zoom function •Parental lock control •AC 100~240V automatic power switching •FCC approved and ETL listed •Home theater speakers •5.1-channel surround sound system with 300W total output •Five full-range satellite speakers •Subwoofer with tuned port for deep bass response **Included accessories:** •Remote control •Two "AAA" batteries •Speaker cables

Order # **ONLY**  
80-7205 **\$79.99**



## COBY® Compact Wireless Internet Radio System

Coby's IR825 puts cutting-edge radio in a compact package. Featuring both wireless internet and FM receiver, this compact system receives broadcasts from both traditional and web radio, giving you flawless reception, premium sound, and thousands of stations to choose from. Programmable station memory lets you save your favorite channels, digital or analog. Additional features include full-range stereo speakers, alarm clock function, and 3.5mm headphone jack for private listening. **Features:** •Access thousands of radio stations free from around the world with a Wi-Fi internet connection •Receives local FM radio broadcasts •Enjoy your entire music collection wirelessly from a computer •Large easy-to-read display •Five internet radio and five FM radio station preset memory •Clock with alarm and sleep timers •Full-range stereo speakers •Convenient 3.5mm headphone jack **Included accessories:** •UL AC adapter

Order # **ONLY**  
80-7235 **\$99.49**

## COBY® 10" Widescreen TFT Under-The-Cabinet DVD/CD Player with ATSC Digital TV Tuner

Introducing Coby's KTFDVD1093 10" widescreen TFT under-the-cabinet DVD/CD player with ATSC digital TV tuner. Enjoy the convenience of DVD entertainment or digital and standard broadcast TV in your kitchen or anywhere else in your home. It supports a host of media formats including DVD, DVD±R/RW, CD, CD-R/RW, JPEG and MP3 compatible. **Features:** •10" widescreen (16:9) TFT color display •Dual ATSC/NTSC tuner for digital and standard TV broadcast reception (DTV ready) •Digital AM/FM radio •Audio/video input jack for video games, VCRs, or other AV sources •Convenient front panel and on-screen display •Integrated stereo speakers •Multiple language, subtitle, and camera angle support •Parental lock control **Included accessories:** •Mounting kit •Remote control •Two 1.5V "AAA" batteries •UL AC adapter •AV cable •FM antenna •AM loop antenna

Order # **ONLY**  
80-7230 **\$199.00**



## COBY® 2.1 Channel DVD Home Theater System

The Coby DVD420 2.1-channel DVD home theater system makes home theater set-up quick and easy. With two full-range satellite speakers and a subwoofer with tuned port for deep bass response and an ultra-compact DVD player, this package can get you up and running in a flash. It also supports a host of media formats including DVD, DVD±R/RW, CD, CD-R/RW and is jpeg compatible. **Features:** •Dolby digital decoder •Digital and analog AV outputs for home theater use •NTSC/PAL compatible •Convenient on-screen display •Multiple language, subtitle, and camera angle support •Picture zoom function •Parental lock control •FCC approved and ETL listed •2.1 channel system with 75W total output power •Two full-range satellite speakers •Wooden subwoofer with tuned port for deep bass response •Convenient volume and bass level controls **Included accessories:** •Remote control •Two "AAA" batteries •AC power cord •AV cable •Speaker cables

Order # **ONLY**  
80-7200 **\$58.49**

## COBY® 19" Widescreen HDTV LCD Television

Coby's 19" LCD TV offers a premium viewing experience, featuring brilliant picture, liquid-crystal display, and dual ATSC/NTSC tuners for great reception of digital signal (DTV-ready). With an HDMI digital connection and a 15 pin VGA interface, this television is perfect for use as a television or computer monitor. Integrated full-range stereo speakers, AV inputs and digital noise reduction also included. **Features:** •19" TFT LCD color display •Dual ATSC/NTSC tuners for digital and standard TV broadcast reception (DTV-ready) •HDMI digital connection for perfect AV signal transmission •HDCP compliance for HDCP content support •AV input jacks for use with media players, DVR/VCRs, video games, and more •15 pin VGA interface for use with computer systems •Full-range stereo speakers (10W) •Digital comb filter and noise reduction •V-chip parental control, closed-caption, and electronic program guide support •Multi-language on-screen display •Wall-mountable design (VESA 75mm x 75mm). **Included accessories:** •AV cable •Remote control •AC power cord •Two "AAA" batteries.



Order # **ONLY**  
80-7175 **\$199.00**



**RATED**  
★★★★★



## COBY® 32" Widescreen HDTV LCD TV

Coby's 32" widescreen LCD TV offers a premium viewing experience, featuring brilliant picture, liquid-crystal display, and dual ATSC/NTSC tuners for great reception of digital signal (DTV-ready). With two HDMI inputs and a 15 pin VGA interface, this television is perfect for use as a television or computer monitor. Integrated full-range stereo speakers, multiple AV connections, and digital noise reduction also included. **Features:** •32" TFT LCD color display •Dual ATSC/NTSC tuners for digital and standard TV broadcast reception (DTV-ready) •HDMI digital connection for perfect AV signal transmission •HDCP compliance for HDCP content support •AV input jacks for use with media players, DVR/VCRs, video games, and more •15 pin VGA interface for use with computer systems •Full-range stereo speakers (10W) •Digital comb filter and noise reduction •V-chip parental control, closed-caption, and electronic program guide support •Multi-language on-screen display •Wall-mountable design (VESA 75mm x 75mm). **Included accessories:** •AV cable •Remote control •AC power cord •Two "AAA" batteries.

Order # **ONLY**  
80-7185 **\$399.00**



## COBY® 26" Widescreen HDTV LCD Television

Coby's 26" widescreen LCD TV offers a premium viewing experience, featuring brilliant picture, liquid-crystal display, and dual ATSC/NTSC tuners for great reception of digital signal (DTV-ready). With two HDMI inputs and a 15 pin VGA interface, this television is perfect for use as a television or computer monitor. Integrated full-range stereo speakers, multiple AV connections, and digital noise reduction also included. **Features:** •26" TFT LCD color display •Dual ATSC/NTSC tuners for digital and standard TV broadcast reception (DTV-ready) •HDMI digital connection for perfect AV signal transmission •HDCP compliance for HDCP content support •AV input jacks for use with media players, DVR/VCRs, video games, and more •15 pin VGA interface for use with computer systems •Full-range stereo speakers (10W) •Digital comb filter and noise reduction •V-chip parental control, closed-caption, and electronic program guide support •Multi-language on-screen display •Wall-mountable design (VESA 75mm x 75mm). **Included accessories:** •AV cable •Remote control •AC power cord •Two "AAA" batteries.

Order # **ONLY**  
80-7180 **\$349.00**